


## Setup Instructions

JVAW62T76MAX


RX

TX

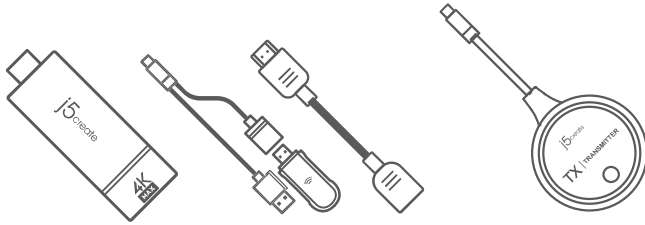


### 1. Connect the RX to Your Display and Power Source

- Plug the HDMI™ connector into an available HDMI™ port on the display.
- Plug the USB™ connector into an available USB™ Type-A port on your display.
- If a USB™ port is not available on your display, you can connect it into a wall outlet using a power adapter.

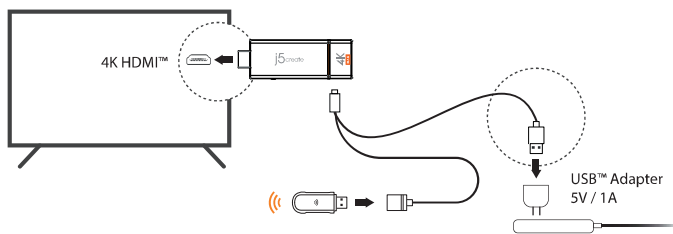

### 2. Power On Your Display And Select Input


- Turn on your display to power up the ScreenCast and select the input until you see the setup screen.
- If your display remains black, your display may not be supplying enough power. In this case, please plug the USB™ cord into a USB™ power adapter and connect it to an outlet.



How to mirror  
and more functions:



[j5create.com/screencast](http://j5create.com/screencast)

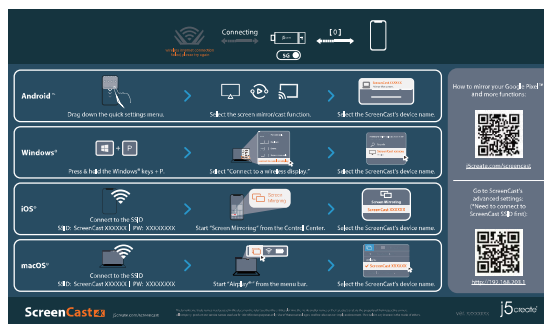


## Casting a Device with the TX (Recommended for Devices with USB-C™ DP™ Output)

### 1. Connect the TX to Your Laptop or Mobile Device


- Plug the TX into a USB-C™ port on a laptop or mobile device. Wait a few seconds until the flashing light on the TX stops, and it will start mirroring automatically.
- If the TX flashes for more than 20 seconds, unplug it and then plug it back in. If it flashes for more than 20 seconds again, it will need to be paired to the RX (See the section titled "How to pair the TX with the RX" below).

Note: TX supports up to 1080p resolution.

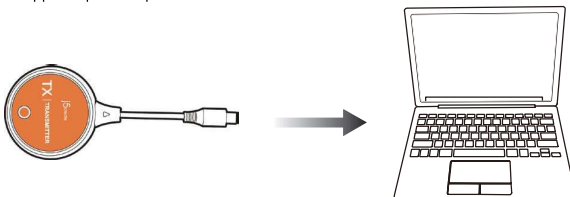

### 2. Stop and Restart Mirroring


Press the TX button to stop or restart mirroring.

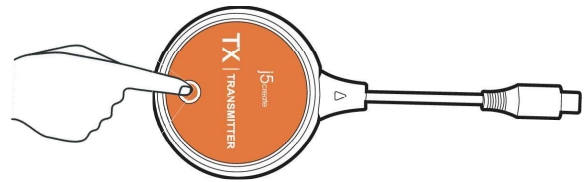


Note: The TX supports mirroring for all laptops and mobile devices running Windows®, macOS®, iPadOS®, and Android™ operating systems. The USB-C™ port on the device must also support DisplayPort™ Alternate Mode.

## Casting a Device Via Miracast™ or Airplay®

### Android™

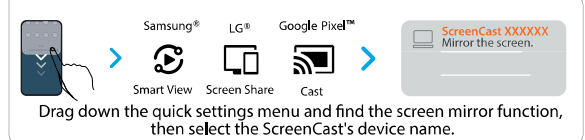


### iOS®

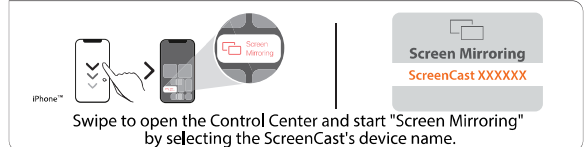

### macOS®



### Windows®

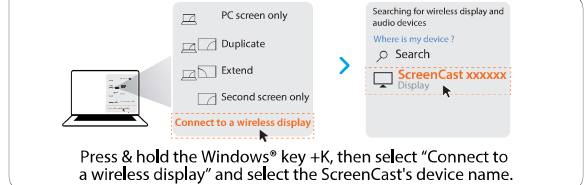

Note:

- For AirPlay®, first connect your device's Wi-Fi® with the SSID of the RX (ScreenCast XXXXXXXX). Please see the section titled "Point-to-Point Mode" below for casting a device without connecting the SSID.
- Due to the limitations of Miracast™ 1.0, the output resolution of the source device will be limited to 1080p, 720p, and 480p. The RX will upscale the source resolution up to 4K with a 4K display.

## Enable the Pincode Function

- Connect your device's Wi-Fi® with the SSID (ScreenCast xxxxxx) and password shown on the display.
- Open a web browser and go to <http://192.168.203.1>
- On the Settings Menu, click "Pincode" and set "Pincode Enable" to "On".
- A random Miracast™ pin will be shown on the display. Only after inputting the correct Miracast™ pin, will the display start to mirror the video. Note: Pincode feature only works for Miracast™.

## Customize Background Image

- Connect your device's Wi-Fi® with the SSID (ScreenCast xxxxxx) and password shown on the display.
- Open a web browser and go to <http://192.168.203.1>
- On the Settings Menu, click "UI Background". Then choose the image file and click "OK" to upload it.

Note: The image file must be 1920 x 1080 resolution, in JPG format, and less than 1MB in file size.

## Point-to-Point Mode

- Press the reset button using a pin/needle to switch to Point-to-Point mode. This mode allows the device to cast to the RX directly without connecting to the SSID.
- Point-to-Point mode only supports **Miracast™** and **AirPlay®**. The Settings Menu (<http://192.168.203.1>) will be unavailable in Point-to-Point mode.
- Press the reset button using a pin/needle on the RX again to switch back to the original mode.

## Wireless Internet Setup

1. Go to your device's wireless Internet settings and search for the ScreenCast's SSID. Connect with the ScreenCast's SSID and input the password. The PW number is shown below the SSID on the home screen.


SSID: ScreenCast xxxxxx  
PW: XXXXXXXX



2. Open your web browser and go to <http://192.168.203.1> and enter the admin gateway.
3. Choose wireless Internet settings and search for your router's SSID. Select your wireless Internet and input the password. The Admin gateway will disconnect while the ScreenCast is connecting to your wireless Internet.



<http://192.168.203.1>



Connect the ScreenCast to your wireless Internet

• Wireless Internet settings success



• Wireless Internet settings incomplete





## (Troubleshooting) How to Pair the TX with the RX

### 1. Turn on pairing mode for the receiver

Press the reset button (or insert the pin to press) for 2 seconds on the RX. Release the button when the screen shows "Release the button to pair with ScreenCast".

2 sec.



Note:



The reset button on the RX has 3 functions, which function is performed depends on the duration the button is held down.

- (1) Press and hold for 1 second: Switch to Point-to-Point mode.
- (2) Press and hold for 2 seconds: Turns on pairing mode for the TX.
- (3) Press and hold for 10 seconds: Resets the receiver to default.

(Note: You can also start pairing mode within the ScreenCast settings instead of using a pin.)

### 2. Press the button on the TX

Plug the TX into the laptop or mobile device to provide power. Press the TX button to complete pairing when the screen shows "Ready to pair".

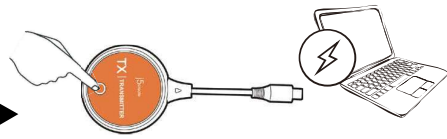

# STOP!

If you have any problems with this product, please contact our technical support team for assistance.

## Limited Warranty

j5create offers a limited 1-year warranty. User's wear & tear damage is not included. The user shall call or email j5create customer service with the defect information of the product and obtain a return authorization number. Users are responsible for one-way return freight cost and we will take care of one-way freight back. In order to obtain a return authorization number, users should have the following information handy when calling or emailing the service team:

- (i) a copy of the original purchase invoice to verify your warranty
- (ii) a product serial number
- (iii) a description of the problem
- (iv) customer's name, address, and telephone number

j5create does not warrant that the operation of the product will be uninterrupted or error-free. j5create is not responsible for damage arising from failure to follow instructions relating to the product's use. This warranty does not apply to: (a) consumable parts, unless damage has occurred due to a defect in materials or workmanship; (b) cosmetic damage, including but not limited to scratches, dents, and broken plastic on ports; (c) damage caused by use with non-j5create products; (d) damage caused by natural disasters; (e) damage caused by human misuse (lost, accident, abuse, misuse or other external causes); (f) damage caused by operating the product outside the permitted or intended uses described by j5create; (g) damage caused by service (including upgrades and expansions) performed by anyone who is not a representative of j5create or a j5create Authorized Service Provider; (h) a product or part that has been modified to alter functionality or capability without the written permission of j5create; or (i) if any j5create serial number on the product has been removed or defaced. If such a situation occurs, j5create will calculate the cost of materials and repair for your reference. This warranty is given by j5create in lieu of any other warranties expressed or implied.

## FCC Warning Statements

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
  - Increase the separation between the equipment and receiver.
  - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
  - Consult the dealer or an experienced radio/TV technician for help.
- This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
- (1) This device may not cause harmful interference, and
  - (2) this device must accept any interference received, including interference that may cause undesired operation.
- changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- The USB™ Type-A port is only for the power supply. If a USB™ Type-A port is connected to a portable device, it will only provide power.

## FCC RF Exposure Warning

- This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.
- The product is restricted for indoor use only.

## Limitation of Warranty

THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY HAVE OTHER RIGHTS THAT VARY FROM STATE TO STATE (OR BY COUNTRY OR PROVINCE). OTHER THAN AS PERMITTED BY LAW, J5CREATE DOES NOT EXCLUDE, LIMIT OR SUSPEND OTHER RIGHTS YOU MAY HAVE, INCLUDING THOSE THAT MAY ARISE FROM THE NONCONFORMITY OF A SALES CONTRACT. FOR A FULL UNDERSTANDING OF YOUR RIGHTS YOU SHOULD CONSULT THE LAWS OF YOUR COUNTRY, PROVINCE OR STATE. TO THE EXTENT NOT PROHIBITED BY LAW IN YOUR STATE, PROVINCE, JURISDICTION OR COUNTRY, THIS WARRANTY AND THE REMEDIES SET FORTH ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, REMEDIES AND CONDITIONS, WHETHER ORAL, WRITTEN, STATUTORY, EXPRESS OR IMPLIED.

J5CREATE'S RESPONSIBILITY FOR MALFUNCTIONS AND DEFECTS IN HARDWARE AND/OR SOFTWARE IS LIMITED TO REPAIR OR REPLACEMENT AS SET FORTH IN THIS WARRANTY. J5CREATE'S LIABILITY DOES NOT EXTEND BEYOND THE REMEDIES PROVIDED FOR IN THIS LIMITED WARRANTY, AND J5CREATE DOES NOT ACCEPT LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, FOR THIRD-PARTY CLAIMS AGAINST YOU FOR DAMAGES, FOR PRODUCTS NOT BEING AVAILABLE FOR USE, OR FOR LOST OR DAMAGED DATA OR SOFTWARE. J5CREATE DOES NOT WARRANT THAT THE OPERATION OF ANY J5CREATE PRODUCT WILL BE UNINTERRUPTED OR ERROR FREE.

J5CREATE'S LIABILITY IN ANY SITUATION WILL BE NO MORE THAN THE AMOUNT YOU PAID FOR THE SPECIFIC PRODUCT THAT IS THE SUBJECT OF A CLAIM. THIS IS THE MAXIMUM AMOUNT FOR WHICH WE ARE RESPONSIBLE, EXCEPT FOR THE EXPRESS WARRANTIES CONTAINED IN THIS WARRANTY AND TO THE EXTENT NOT PROHIBITED BY LAW, J5CREATE DISCLAIMS ALL OTHER WARRANTIES AND CONDITIONS, EXPRESS OR IMPLIED, STATUTORY OR OTHERWISE, INCLUDING WITHOUT LIMITATION, WARRANTIES OF MERCHANTABILITY, MERCHANTABLE QUALITY AND FITNESS FOR A PARTICULAR PURPOSE AND WARRANTIES AND CONDITIONS AGAINST HIDDEN OR LATENT DEFECTS. SOME STATES, PROVINCES, JURISDICTIONS OR COUNTRIES DO NOT ALLOW DISCLAIMERS OF IMPLIED WARRANTIES AND CONDITIONS, SO THIS DISCLAIMER MAY NOT APPLY TO YOU.

TO THE EXTENT SUCH WARRANTIES AND CONDITIONS CANNOT BE DISCLAIMED UNDER THE LAWS OF THE UNITED STATES, CANADA (AND ITS PROVINCES) OR OTHERWISE, J5CREATE LIMITS THE DURATION AND REMEDIES OF SUCH WARRANTIES AND CONDITIONS TO THE DURATION OF THIS EXPRESS LIMITED WARRANTY AND, AT J5CREATE'S OPTION, REPAIR OR REPLACEMENT SERVICES. SOME STATES, PROVINCES, JURISDICTIONS OR COUNTRIES MAY NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY OR CONDITION MAY LAST, SO THE LIMITATION DESCRIBED ABOVE MAY NOT APPLY TO YOU.

NO WARRANTIES OR CONDITIONS, WHETHER EXPRESS OR IMPLIED, WILL APPLY AFTER THE LIMITED WARRANTY PERIOD HAS EXPIRED. SOME STATES, PROVINCES, JURISDICTIONS OR COUNTRIES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY OR CONDITION LASTS, SO THIS LIMITATION MAY NOT APPLY TO YOU.

WARRANTY SUPPORT ONLY APPLIES WHEN THE COVERED PRODUCT IS LOCATED WITHIN THE COUNTRY IN WHICH J5CREATE ORIGINALLY SOLD THE SYSTEM, AS REFLECTED IN J5CREATE'S RECORDS. IF YOU NEED SUPPORT FOR THE PRODUCT OUTSIDE OF THE COUNTRY OF ORIGIN (FOR EXAMPLE, WHILE TRAVELING, OR IF THE SYSTEM HAS BEEN RELOCATED TO A NEW COUNTRY), THEN J5CREATE MAY OFFER YOU OTHER SUPPORT OPTIONS FOR AN ADDITIONAL CHARGE.

For more information, please visit our website at <http://www.j5create.com>

Copyright© 2025 J5create. All rights reserved. All trade names are registered trademarks of their respective owners. Features and specifications are subject to change without notice. Product may not be exactly as shown in the diagrams.

HDMI is a trademark of HDMI Licensing Administrator, Inc., its affiliates or its respective owners, registered or used in many jurisdictions worldwide. USB and USB-C are trademarks of USB Implementers Forum, Inc., its affiliates or its respective owners, registered or used in many jurisdictions worldwide. Android, Google Play and Google Cast are trademarks of Google LLC, its affiliates or its respective owners, registered or used in many jurisdictions worldwide. iOS, macOS, iPhone, iPadOS, and AirPods are trademarks of Apple Inc., its affiliates or its respective owners, registered or used in many jurisdictions worldwide. Samsung is a trademark of Samsung Electronics Co., Ltd., its affiliates or its respective owners, registered or used in many jurisdictions worldwide. LG is a trademark of LG Electronics, its affiliates or its respective owners, registered or used in many jurisdictions worldwide. Windows is a trademark of Microsoft Corp., its affiliates or its respective owners, registered or used in many jurisdictions worldwide. Miracast and Wi-Fi are trademarks of Wi-Fi Alliance, its affiliates or its respective owners, registered or used in many jurisdictions worldwide. DP and DisplayPort are trademarks of Video Electronics Standards Association, its affiliates or its respective owners, registered or used in many jurisdictions worldwide. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks and/or names or their products and are the property of their respective owners. All company, product and service names used are for identification purposes only. Use of these names, logos, and brands does not imply endorsement. We disclaim any interest in the marks of others.

## TECHNICAL SUPPORT

Customer Service : **888-988-0488**  
Technical Support : **888-689-4088**  
Email : **service@j5create.com**

### SOPORTE TÉCNICO

Número gratuito: +1-888-988-0488  
Horario de atención:  
Lun-Vier, 10:00 a.m. - 6:00 p.m. U.S.A.-E.S.T  
Email: service@j5create.com

### Kajiet Technology International B.V.

Phone Number: +31 (10) 7986117  
Customer service hours:  
Mon. - Fri. 10:00 a.m. - 6:00 p.m. EST  
E-mail: service@j5create.com

### TECHNISCHER SUPPORT

Kostenloser Anruf bei: +1-888-988-0488  
Sprechstunden:  
Mon.-Frei. 10.00 - 18.00 U.S.A.-E.S.T  
E-mail: service@j5create.com

### TECHNIKAI SEGÍTSÉG

Vevőszolgálat (angol nyelven): 888-988-0488  
Technikai támogatás (angol nyelven): 888-689-4088  
E-mail: service@j5create.com

### SUPPORT TECHNIQUE

Número gratuito: +1-888-988-0488  
Heures d'ouverture:  
Lun.-Ven. 10:00 a.m. - 06:00 U.S.A.-E.S.T  
Email: service@j5create.com

### TECHNICKÁ PODPORA

Zákaznická linka: 888-988-0488  
Technická podpora: 888-689-4088  
E-mail: service@j5create.com

### テクニカルサポート

お客様相談センター: 03-5540-9010 / 電子メール: j5\_support@solnet.co.jp  
テクニカルサポートやその他のご相談は下記の時間にくださいますようお願い申し上げます  
営業時間: 平日9:30~11:30/13:30~17:30

### 凱捷國際科技股份有限公司

236新北市土城區忠孝路109號8樓  
台灣客服專線: 02-2269-5533#19  
客服時間: 星期一至五9:30~18:00  
Email 信箱: service.tw@j5cre