




## Hinged Media Storage Panel

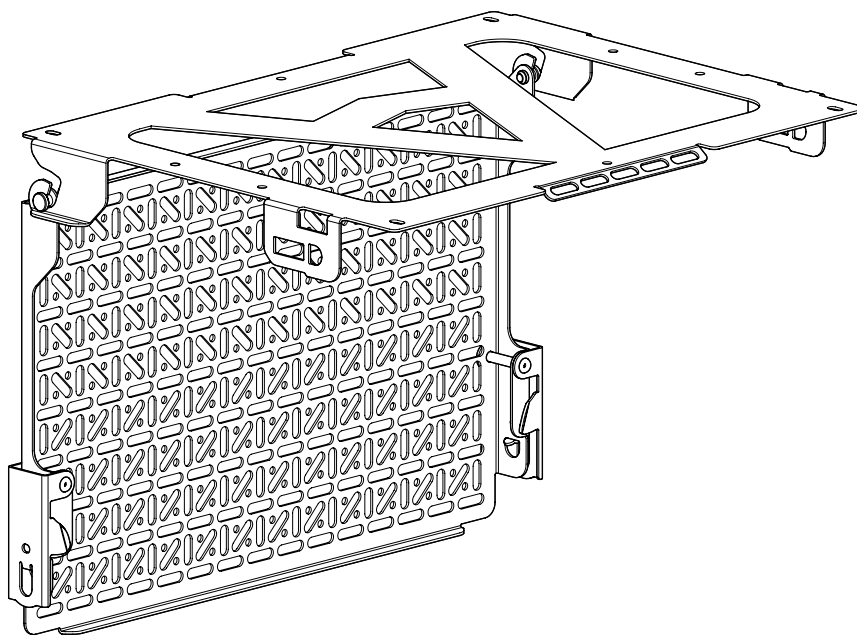

### COMPONENT CHECKLIST

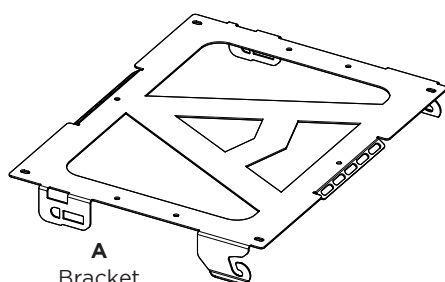

**A**  
Bracket  
(x1)

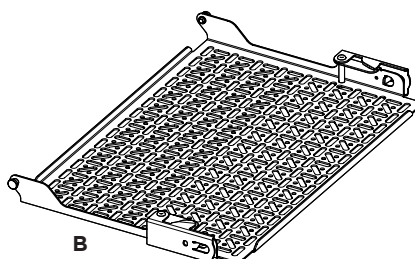

**B**  
Tray  
(x1)



**C**  
#10 x 16mm (5/8")  
Wood screw\*  
(x6)



**D**  
Hook & loop  
16mm x 500mm  
(5/8" x 20")



**E**  
M5 Flat  
Washer  
(x12)



**F**  
M4 x 12mm  
Securing screw  
(Optional) (x2)

\* Professional installer to ensure appropriate fastener length & type to suit surface where bracket is installed.

Desk 

### REQUIRED TOOLS

- Phillips head screwdriver
- Power drill
- 3.5mm (1/8") drill bit

### WEIGHT RANGE

0 - 8kg  
(0 - 17.5lbs)

### IMPORTANT INFORMATION


- ! Please ensure this product is installed as per these installation instructions.
- ! The manufacturer accepts no responsibility for incorrect installation.
- ! Failure to mount this product correctly may cause serious injury/death during or following installation.
- ! Exercise caution when closing tray to avoid damage to cables or components.
- ! This product should only be installed by professional installers of good mechanical aptitude, who fully understand these instructions and the consequences of incorrect installation.
- ! Check load capacity of surface prior to installation. Failure to provide adequate structural strength for this product can result in serious personal injury or damage to equipment. It is professional installer's responsibility to ensure suitable structural capacity of desk (including appropriate safety factor) to support total weight of all equipment being mounted.
- ! This product only to be used on underside of horizontal surface.
- ! This product is not suitable for outdoors use.
- ! Do not use this product for mobile applications.

## 1. Attach components to tray


**1.1** Mount components on side of Tray **B** shown.

Components can be attached with hook & loop, cable ties, or the fasteners provided with your components..

**Tip:** Use Washers **E** when using component fasteners if needed

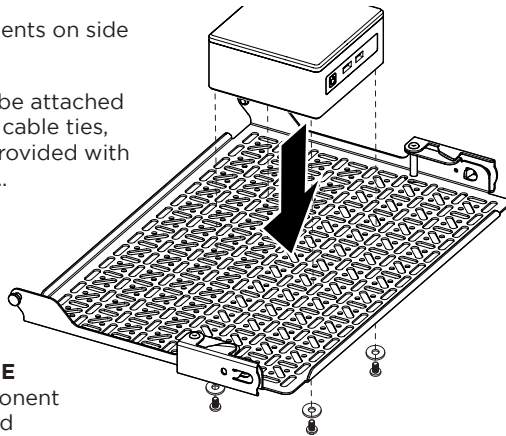


**1.2** Cable exit and entry always at hinge end.

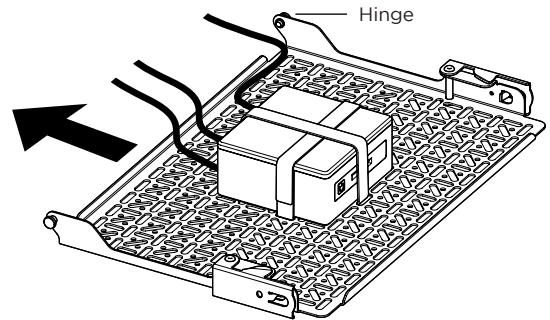

## 2. Choose product configuration then attach bracket

### OPTION A - Enclosed components


Components up to 54mm (2 1/8") high can be enclosed.

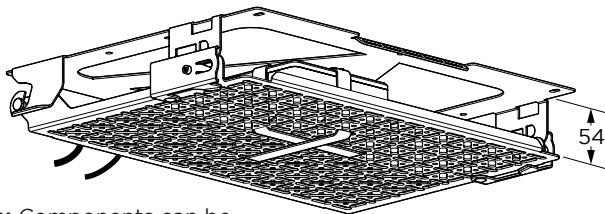


**Tip:** Components can be mounted on both sides of tray in enclosed position.

### OPTION B - Exposed components

Components greater than 54mm (2 1/8") high must be exposed.

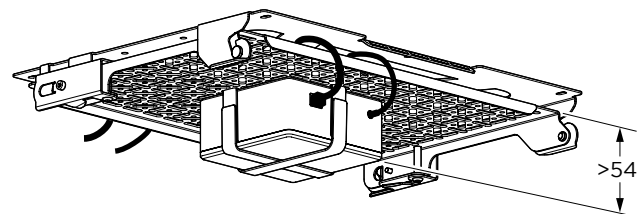


**2.1A** Position hooks towards back to make components accessible when tray hanging for maintenance.

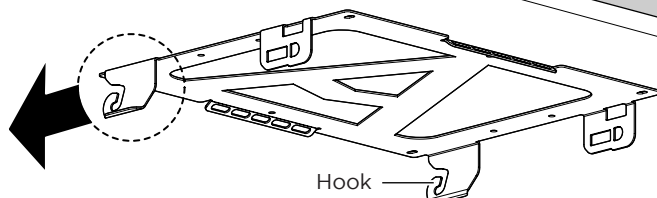


**Enclosed configuration bracket orientation**

**2.1B** Position hooks towards front to make components accessible when tray hanging for maintenance.

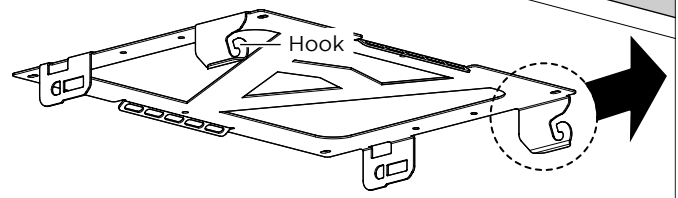

**Exposed configuration bracket orientation**

**2.2** Ensure sufficient clearance to walls/desk structure for tray attachment and latching.

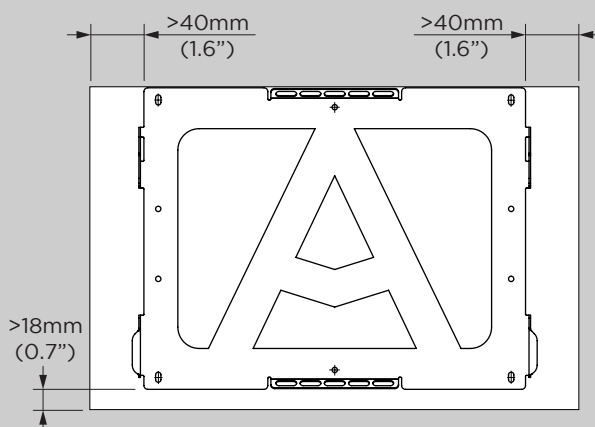


**Minimum clearance**

**2.3** Check surface thick enough and material appropriate for supplied #10 x 16mm (5/8") Wood Screws **C**.

**2.4** Use Bracket **A** as a drilling template and mark mounting hole centres.


**Tip:** Front and back tabs with slot detail are a place to attach cables independent of hinging tray

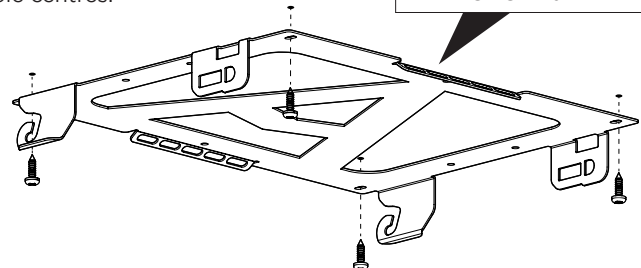

**2.5** Carefully drill 3.5mm (1/8") pilot holes. Fasten Bracket with Wood Screws **C**.

### 3. Attach tray


**3.1** Lift Tray **B** with two hands and engage simultaneously with hook detail on both sides of Bracket **A**.

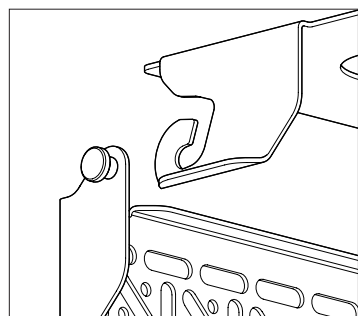

**3.2** With latches in open position rotate Tray **B** until parallel with mounting surface.

Enclosed


**NOTE:** Cables must always exit at the hinging side of tray

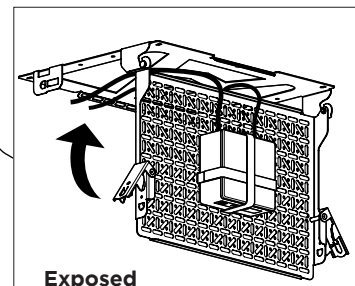



Exposed

### 4. Secure tray

**4.1** Line up latches with holes in bracket and rotating inwards until they engage with a click.

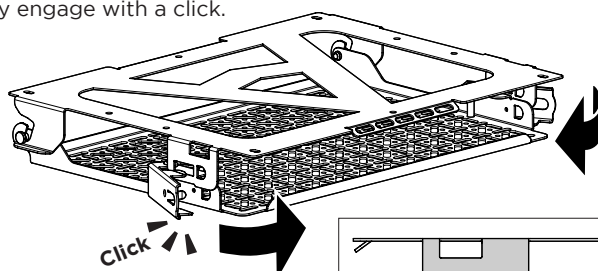


Enclosed latch position

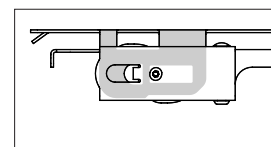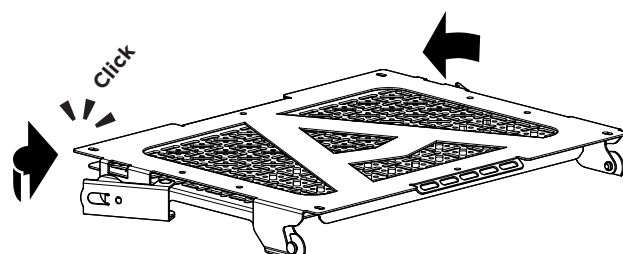


Exposed latch position

**4.2 (OPTIONAL)** For extra security attach M4 screws **F**, cable ties or locks to both latches.

Do not overtighten screws.

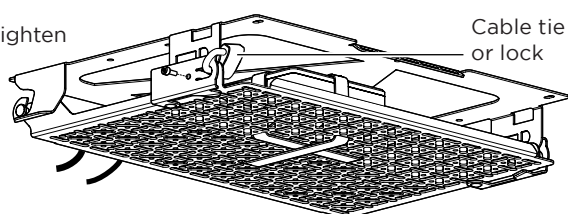

Securing screw **F**


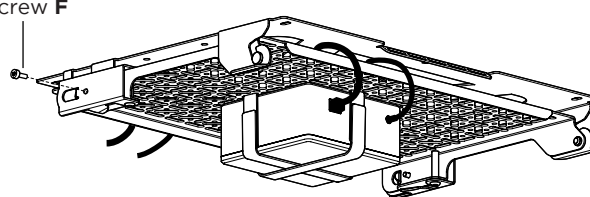


### 5. Component maintenance

**5.1** Check for and remove any securing screws, cable ties or locks.

**5.2** Use two hands to support tray while opening both latches. Smoothly rotate tray into hanging position.

Components accessible without need to remove tray.

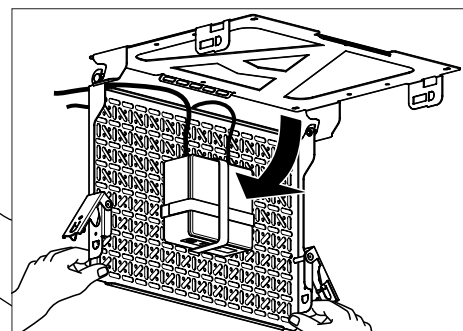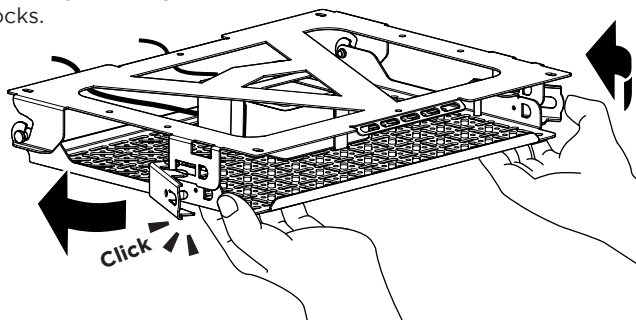

**ATDEC**

No portion of this document or any artwork contained herein should be reproduced in any way without the express written consent of Atdec Pty Ltd. Due to continuing product development, the manufacturer reserves the right to alter specifications without notice. ©20230803

Please Recycle ♻️