


# Freestanding Dual Vertical

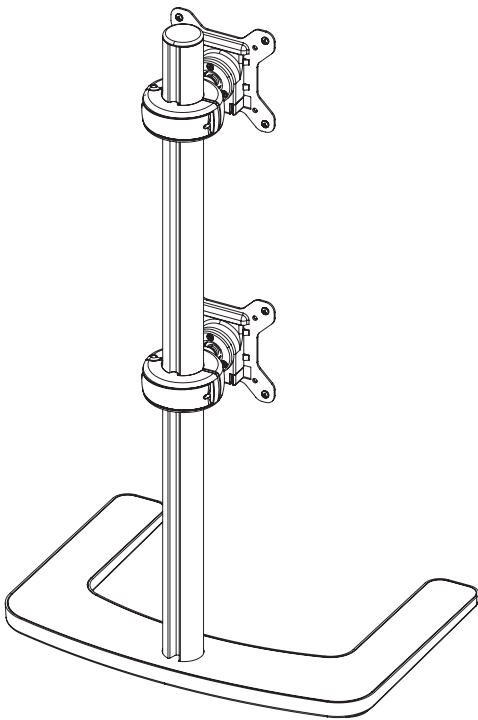

## COMPONENT CHECKLIST

**B**  
Upright Pole (x1)

**A**  
Base (x1)

**D**  
Quickshift Donut (x2)

**E**  
VESA Plate (x2)

**F**  
3/5mm Allen Key (x1 each)

**G**  
M8x50mm Screw (x1)

**L**  
(Optional) Security Screw (x2)

**I**  
Mounting Screw M4x16mm (x8)

**J**  
Mounting Screw M4x12mm (x8)

**K**  
Mounting Screw M4x10mm (x8)

**M**  
Cable Ball (x4)

**N**  
Cable Clip (x3)



## REQUIRED TOOLS

- Phillips Head Screwdriver

## WEIGHT RANGE Per Monitor


Flat Monitor	Curved Monitor
0 - 12kg 0 - 26.5lbs	0 - 12kg 0 - 26.5lbs

## IMPORTANT INFORMATION

- ! Please ensure this product is installed as per these installation instructions.
- ! Each Quickshift Donut supports a maximum weight of 12kg (26.5lbs)
- ! This product supports VESA mounting hole configurations: 75x75mm and 100x100mm.
- ! The manufacturer accepts no responsibility for incorrect installation.
- ! Curved monitors, deep devices (such as all-in-one PCs) and offset VESA locations exert additional leverage that can exceed the capacity of the mount even though the monitor weight may be within the stated range. Please contact Atdec if you would like further information.


## 1. Attach Upright Pole to Base

**1.1** Attach the Upright Pole to the Base as shown below. Ensure the Cable Slot faces towards the rear.

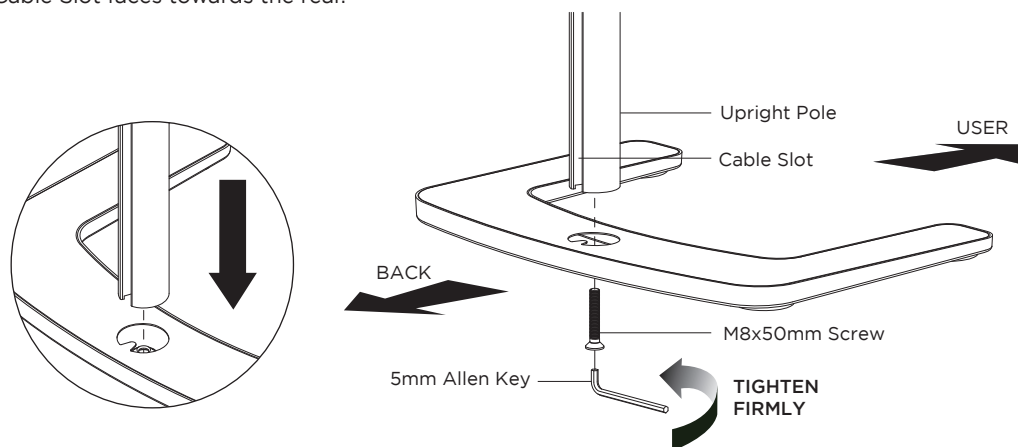


### OPTIONAL BOLT THROUGH & GROMMET MOUNT

Mount can also be bolted through work surface or grommet hole with the Atdec Grommet Clamp (AC-GC), sold separately.




## 2. Attach Quickshift Donuts to the Pole (Ensure the cable slot faces towards the rear)


**2.1** Slide the Quickshift Donut onto the Pole.

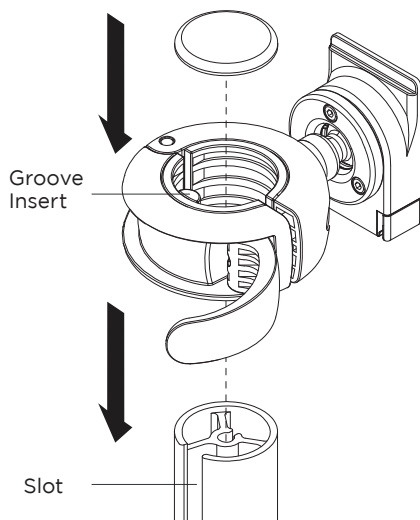

**2.2** If the Quickshift Donut requires further tightening use the supplied 5mm Allen key.

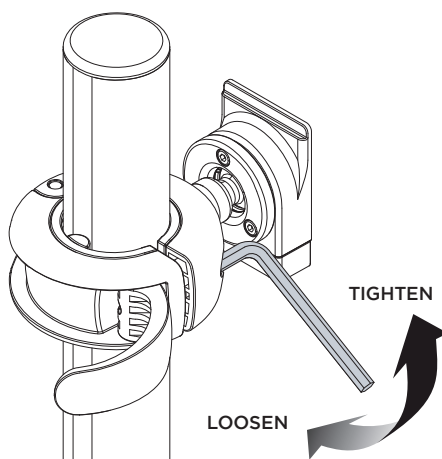


**2.3** Close the lever to lock the Quickshift Donut in place.

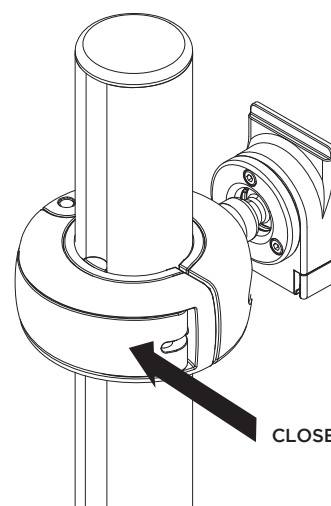


## 3. Attach the VESA Plate to your monitor (Repeat steps 3 to 6 for each monitor)


**3.1** Check VESA mounting compatibility

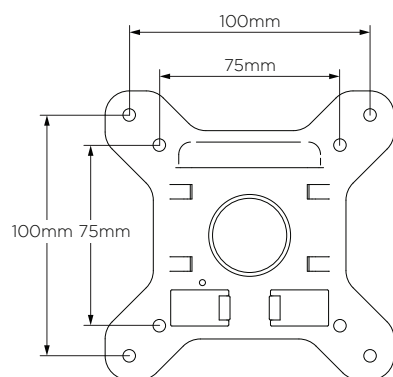

**3.2** Screw VESA Plate to back of monitor using provided screws.

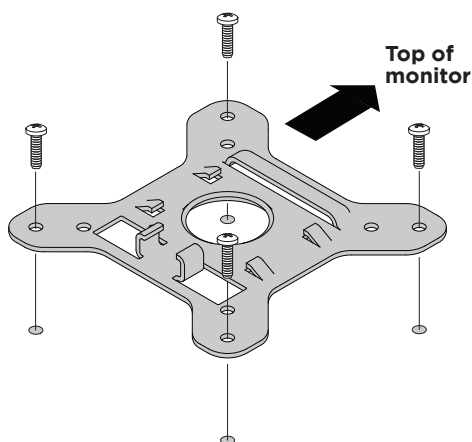


**NOTE:** Be sure to select a screw length that suits the monitor.

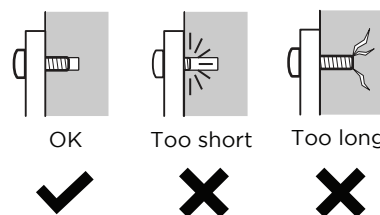


4. Attach your Display to the Quickshift Donut


**4.1** Hook the top of the VESA plate onto the Quickshift Mount.

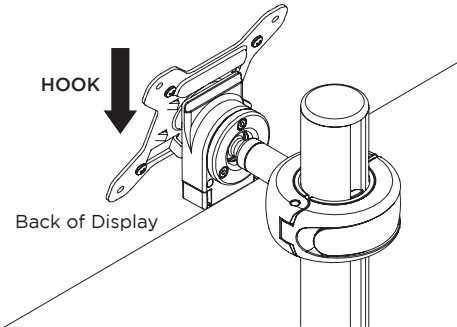

**4.2** Press and hold the Release Buttons. Gently push bottom of VESA Plate into Quickshift Mount. Release Buttons to lock in place.

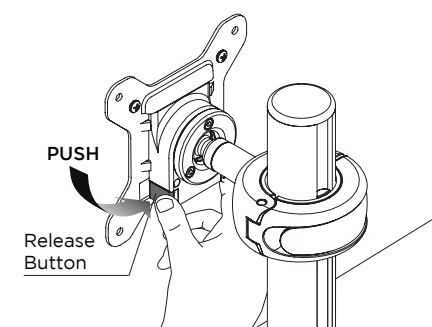


**4.3** (Optional) Insert the Security Screw, and tighten using a Phillips-head Screwdriver.

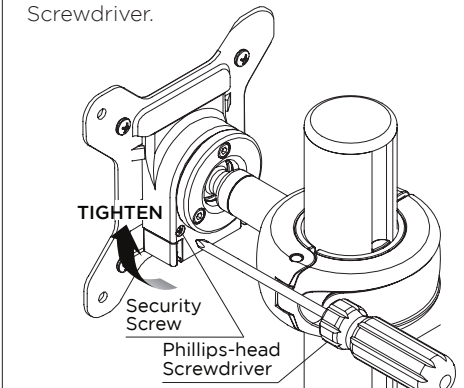


5. Adjust the Height of the Quickshift Donut


**5.1** Open the lever to loosen the Quickshift Donut.

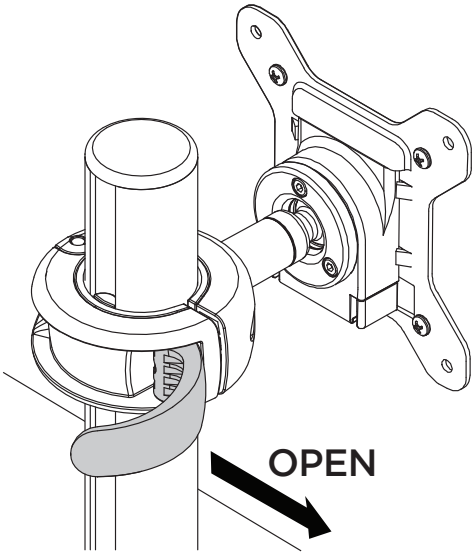


**5.2** Slide the Quickshift Donut to desired position.

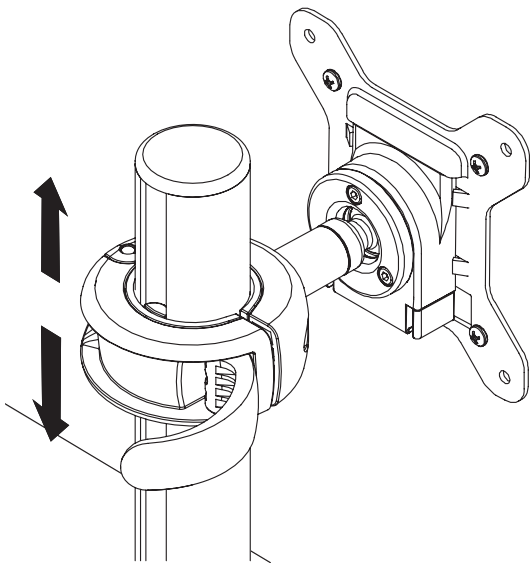

**5.3** If necessary, adjust the tension between the Donut and the Pole using the 5mm Allen Key supplied.

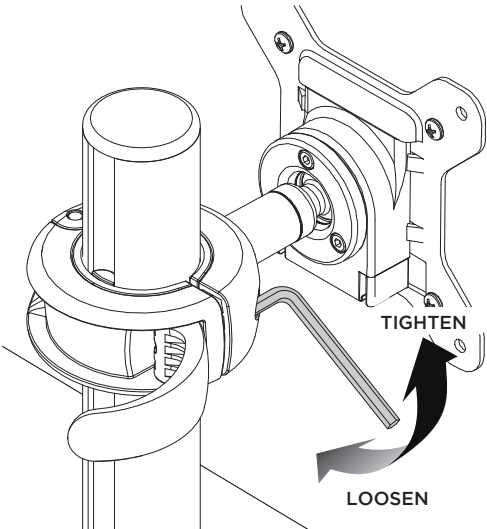


**5.4** Close the lever to lock the Quickshift Donut in place.

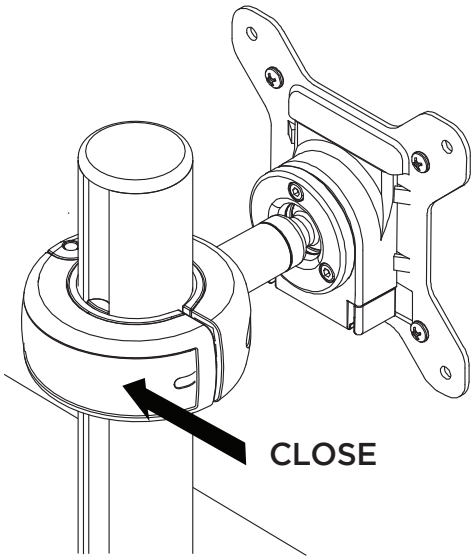

## 6. Adjust the ball joint tension

**6.1** If the monitors are not holding position or are stiff to move, adjust the tension plate by tightening or loosening the three screws.

**Note:** Support the monitor while making adjustments.

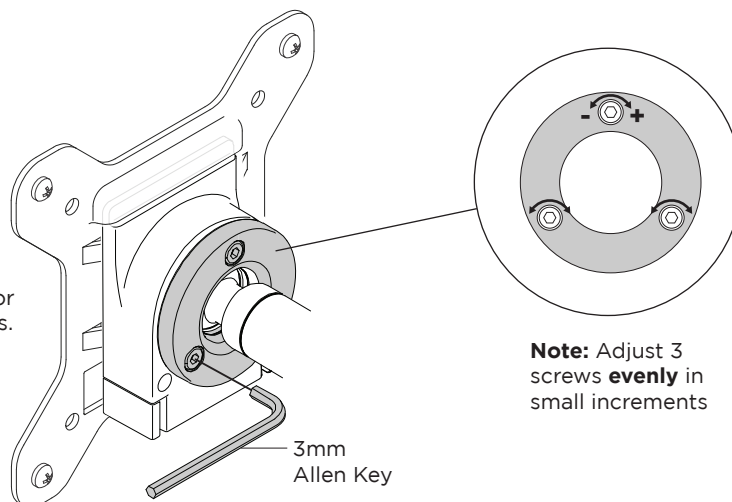

## 7. Cable Management

Connect cables to your Displays, routing them down to the rear of the poles.

Push the cables into the slots, using either the Cable Balls or Cable Clips to secure them to the pole as shown.

**Note:** Ensure enough slack is left in cables to allow for movement. When the slot in each pole cannot be used, use the supplied Cable Clips to secure the cables.

