

SL4304

Pantone® Validated Signage



Digital Signage with Pantone Validated® and Pantone® SkinTone™ Validated

Designed for those who value authentic color representation and accurate depiction of skin tones, BenQ products offer creative professionals exceptional color quality in partnership with Pantone, the world's foremost authority on color.




EDLA certified Digital Signage

You can get easy access to all core Google apps such as Chrome, Docs, and YouTube, as well as your favorite apps on the Google Play Store. You can also enjoy compatibility with Microsoft apps and tools such as Word, PowerPoint, Excel, and Teams for a versatile collaboration experience.



Better device security:

AMS and DMS, BenQ's free built-in software, provide secure login options, strict access controls, and regular system updates alongside additional protection against app vulnerabilities through Google Play Protect.

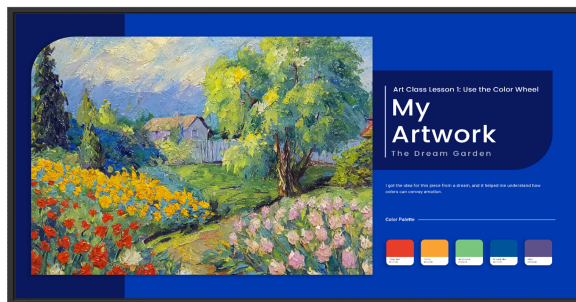

| | | |
|-------------------|------------------------------------|--|
| Panel | Screen Size | 43" |
| | Panel Surface | AG, Haze 25% |
| | Color gamut | sRGB 99%, NTS C72% |
| | Resolution (pixels) | UHD 3840 × 2160 |
| | Active area (H × V) | 941.2 × 529.4 mm 37.1 × 20.8 inch |
| | Brightness (typical) | 500 nits |
| | Contrast Ratio (typical) | 1200:1 |
| | Light Life (typical) | 50,000hrs |
| | Display Orientation | Landscape / Portrait |
| Platform Solution | Memory Storage OS | 8GB 64GB Android 13.0 |
| Speaker | Internal Speaker | 12 W × 2 |
| Connectivity | HDMI (in out) | ×2 (2.0 × 2) No |
| | Line in / out (3.5mm) | N/A ×1 |
| | Ethernet LAN | 1 × 10 / 100 Mbps (Android) |
| | USB (Type A) (Type B) | ×2 (2.0 × 2) No |
| | RS232 (in out) | ×1 ×1 |
| | Power (AC) in Out Power Switch | 1 N/A 1 |
| Physical | Weight (product shipping) | 8.7 kg 11.7 kg (19.2 lbs 25.8 lbs) |
| | Dimensions (W x H x D) | 967.8 × 558.2 × 55.6 mm (38.1 × 22 × 2.2 inch) |
| | Bezel width (T B L R) | 11.9 12.8 11.9 11.9 mm (0.5 0.5 0.5 0.5 inch) |
| | Wall Mounting (VESA) | 4 - M6 × 12L |
| Power | Voltage | 100V ~ 240V, 50Hz / 60Hz |
| | Typical | 68.3 W |
| Environment | Operation Temperature | 0°C ~ 40°C 32°F ~ 104°F |
| | Storage Temperature | -10°C ~ 60°C 14°F ~ 140°F |
| Language | OSD | 28L (AR, CS, DA, DE, EL, EN, ES-ES, FA, FI, FR, HE, HU, ID, IT, JA, KO, NB, NL, PL, PT-BR, RO, RU, SV, TH, TR, VI, ZH-CN, ZH-TW) |
| Package | Remote Controller | Yes |
| | Power Cord | By region |
| | Cables | 1 × HDMI (1.5 m 4.9 ft) |
| Software | Content management | X-Sign 3.0 |
| | Device Management | DMS |
| | Account Management | AMS |
| | Wireless screen sharing | InstaShare 2 |
| Picture mode | Pantone, M-book, Coding, ePaper | |

Software



X-Sign

Wireless screen sharing & casting from any device.
Share several screens simultaneously, with different types of content.



InstaShare 2

Wireless screen sharing & casting from any device.
Share several screens simultaneously, with different types of content.



DMS

Device Management Solution centrally oversees all displays to get real-time status information, deploy OTA updates & more.



AMS

Account Management System to conveniently load and access your account and cloud storage from any BenQ display.

Input and output terminals

Down I/O



USB 2.0

USB 2.0

LAN


Audio
out

RS232
in

HDMI

HDMI

Dimensions (mm)

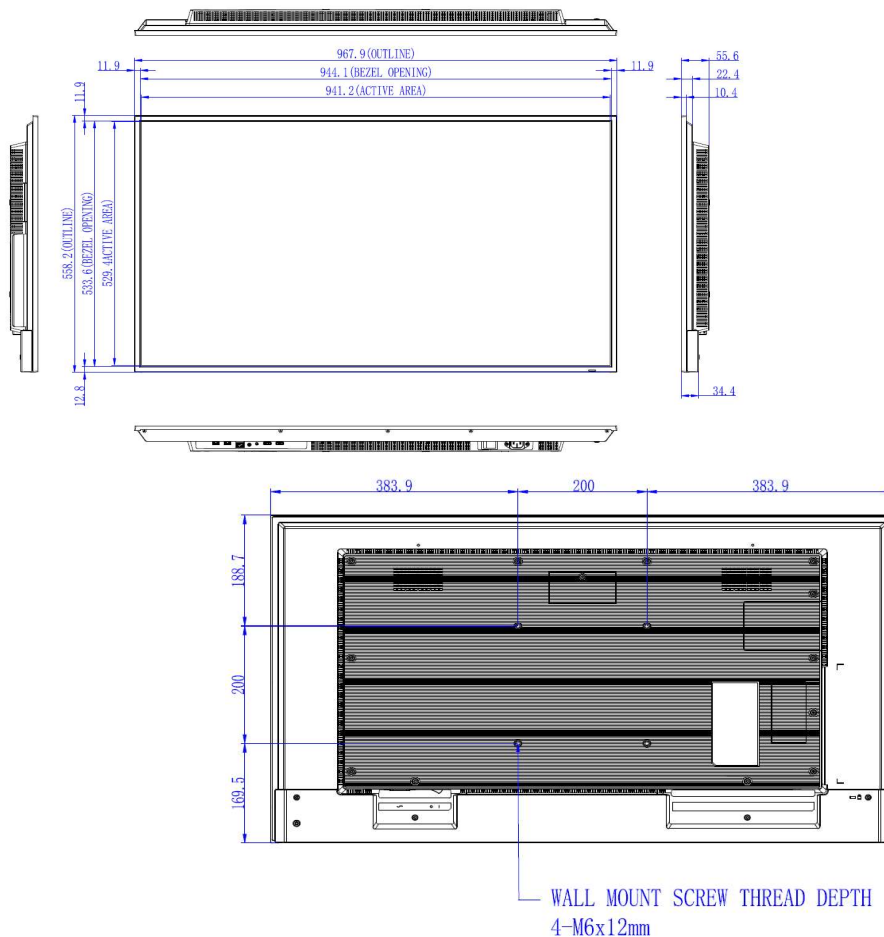

BenQ



© 2024 BenQ Corp. Specifications may vary by region, please visit your local stores for details.
The actual product's features and specifications are subject to change without notice. This material may include corporate names, trademarks and logos of third parties which are the properties of the third parties respectively.

<https://education.benq.com/>