

# SL6504

# Pantone® Validated Signage





# Digital Signage with Pantone Validated® and Pantone® SkinTone™ Validated

Designed for those who value authentic color representation and accurate depiction of skin tones, BenQ products offer creative professionals exceptional color quality in partnership with Pantone, the world's foremost authority on



#### **EDLA certified Digital Signage**

You can get easy access to all core Google apps such as Chrome, Docs, and YouTube, as well as your favorite apps on the Google Play Store. You can also enjoy compatibility with Microsoft apps and tools such as Word, PowerPoint, Excel, and Teams for a versatile collaboration experience.



#### **Better device security:**

AMS and DMS, BenQ's free built-in software, provide secure login options, strict access controls, and regular system updates alongside additional protection against

ann vulnorabilition through





	Screen Size	65"	
Panel	Panel Surface	AG, Haze 25%	
	Color gamut	sRGB 99%, 72% NTSC	
	Resolution (pixels)	UHD 3840 × 2160	
	Active area (H × V)	1428.5 × 803.5	
	Brightness (typical)	500 nits	
	Contrast Ratio (typical)	1200:1	
	Light Life (typical)	50,000hrs	
	Display Orientation	Landscape / Portrait	
Platform Solution	Memory   Storage   OS	8GB   64GB   Android 13.0	
Speaker	Internal Speaker	12 W × 2	
	HDMI (in   out)	×2 (2.0 × 2)   No	
Connectivity	Line in / out (3.5mm)	N/A   ×1	
	Ethernet LAN	1 × 10 / 100 Mbps (Android)	
	USB (Type A)   (Type B)	×2 (2.0 × 2)   No	
	RS232 ( in   out)	×1   ×1	
	Power (AC) In   Out   Power	1 N/A 1	
	Switch		
Physical	Weight (product I shipping)	20.7kg   28.7kg (45.6 lbs   63.3	
		lbs) 1456.4 × 833.7 × 57 mm (57.3 ×	
	Dimensions (W x H x D)	32.8 × 2.2 inch)	
		12.5   12.5   11.8   11.8 mm (0.5	
	Bezel width (TIBILIR)	0.5   0.5   0.5 inch)	
Power	Wall Mounting (VESA) (mm)	4 - M8 × 16L	
	Voltage	100V ~ 240V, 50Hz / 60Hz	
1 GWei	Typical	110.3 W	
Environment	Operation Temperature	0°C ~ 40°C   32°F ~ 104°F	
Liiviioiiiiciit	Storage Temperature	-10°C ~ 60°C   14°F ~ 140°F	
Language	OSD	28L (AR, CS, DA, DE, EL, EN, ES-	
		ES, FA, FI, FR, HE, HU, ID, IT, JA,	
		KO, NB, NL, PL, PT-BR, RO, RU, SV,	
Package		TH, TR, VI, ZH-CN, ZH-TW)	
	Remote Controller	Yes	
	Power Cord	By region	
	Cables	1 × HDMI (1.5 m   4.9 ft)	
Software	Content management	X-Sign 3.0	
	Device Management	DMS	
	Account Management	AMS	
	Wireless screen sharing	InstaShare 2	
Picture mode	Picture mode Pantone, M-book, Coding, ePaper		

#### Software









# X-Sign

Wireless screen sharing & casting from any device. Share several screens simultaneously, with different types of content.

#### InstaShare 2

Wireless screen sharing & casting from any device. Share several screens simultaneously, with different types of content.

#### **DMS**


Device Management Solution centrally oversees all displays to get real-time status information, deploy OTA updates & more.

#### **AMS**

Account Management System to conveniently load and access your account and cloud storage from any BenQ display.

# Input and output terminals

# Down I/O




out

RS232 in

**HDMI** HDMI

#### Dimensions (mm)

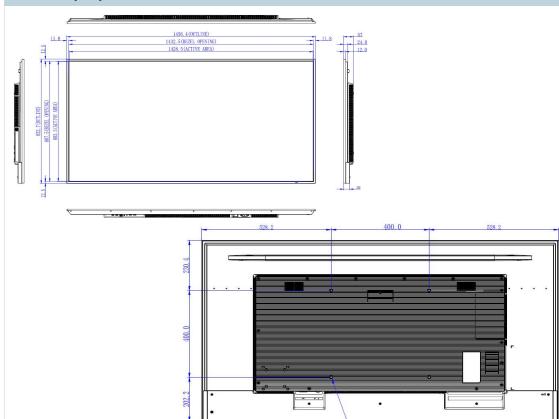

# **Benq**

© 2024 BenQ Corp. Specifications may vary by region, please visit your local stores for details. The actual product's features and specifications are subject to change without notice. This material may include corporate names, trademarks and logos of third parties which are the properties of the third parties respectively.



WALL MOUNT SCREW THREAD DEPTH:

4-M8x16mm

https://education.benq.com/