

SL7504

Pantone validated signage



Digital Signage with Pantone Validated® and Pantone® SkinTone™ Validated

Designed for those who value authentic color representation and accurate depiction of skin tones, BenQ products offer creative professionals exceptional color quality in partnership with Pantone, the world's foremost authority on color.




EDLA certified Digital Signage

You can get easy access to all core Google apps such as Chrome, Docs, and YouTube, as well as your favorite apps on the Google Play Store. You can also enjoy compatibility with Microsoft apps and tools such as Word, PowerPoint, Excel, and Teams for a versatile collaboration experience.



Better device security:

AMS and DMS, BenQ's free built-in software, provide secure login options, strict access controls, and regular system updates alongside additional protection against app vulnerabilities through Google Play Protect.

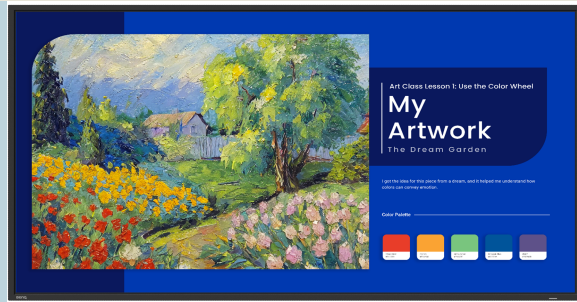

Panel	Screen Size	75"
	Panel Surface	AG, Haze 25%
	Color gamut	sRGB 99%, 72% NTSC
	Resolution (pixels)	UHD 3840 × 2160
	Active area (H × V)	1649.7 × 927.9 mm (64.9 × 36.5 inch)
	Brightness (typical)	500 nits
	Contrast Ratio (typical)	1200:1
	Light Life (typical)	50,000hrs
	Display Orientation	Landscape / Portrait
Platform Solution	Memory Storage OS	8GB 64GB Android 13.0
Speaker	Internal Speaker	12 W × 2
Connectivity	HDMI (in out)	×2 (2.0 × 2) No
	Line in / out (3.5mm)	N/A ×1
	Ethernet LAN	1 × 10 / 100 Mbps (Android)
	USB (Type A) (Type B)	×2 (2.0 × 2) No
	RS232 (in out)	×1 ×1
	Power (AC) in out Power Switch	1 N/A 1
Physical	Weight (product shipping)	29kg 40.5kg (63.9 lbs 89.3 lbs)
	Dimension (W×H×D)	1679.7 × 959 × 56.8 mm (66.1 × 37.8 × 2.2 inch)
	Bezel width (T B L R)	13 13.5 13 13 mm (0.5 0.5 0.5 0.5 inch)
	Wall Mounting (VESA)	4 - M8 × 16L
Power	Voltage	100V ~ 240V, 50Hz / 60Hz
	Typical	120.8 W
Environment	Operation Temperature	0°C ~ 40°C 32°F ~ 104°F
	Storage Temperature	-10°C ~ 60°C 14°F ~ 140°F
Language	OSD	28L (AR, CS, DA, DE, EL, EN, ES-ES, FA, FI, FR, HE, HU, ID, IT, JA, KO, NB, NL, PL, PT-BR, RO, RU, SV, TH, TR, VI, ZH-CN, ZH-TW)
Package	Remote Controller	Yes
	Power Cord	By region
	Cables	1 × HDMI (1.5 m 4.9 ft)
Software	Content management	X-Sign 3.0
	Device Management	DMS
	Account Management	AMS
	Wireless screen sharing	InstaShare 2
Picture mode	Pantone, M-Book, Coding, ePaper	

Software



X-Sign

Wireless screen sharing & casting from any device.
Share several screens simultaneously, with different types of content.



InstaShare 2

Wireless screen sharing & casting from any device.
Share several screens simultaneously, with different types of content.



DMS

Device Management Solution centrally oversees all displays to get real-time status information, deploy OTA updates & more.



AMS

Account Management System to conveniently load and access your account and cloud storage from any BenQ display.

Input and output terminals


Down I/O



USB 2.0



USB 2.0



LAN



Audio
out



RS232
in




HDMI



HDMI

Dimensions (mm)

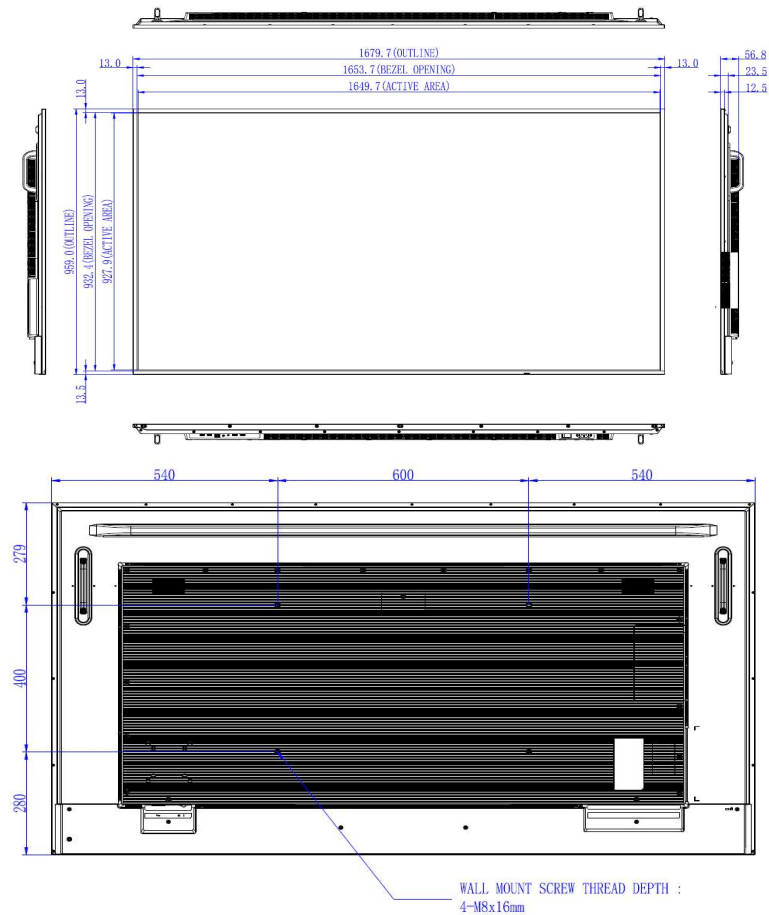

BenQ



© 2024 BenQ Corp. Specifications may vary by region, please visit your local stores for details.
The actual product's features and specifications are subject to change without notice. This material may include corporate names, trademarks and logos of third parties which are the properties of the third parties respectively.

<https://education.benq.com/>