



Because it matters

Dealer's Stamp

Headquarters BenQ Corporation 16 Jihu Road, Neihu, Taipei 114, Taiwan Tel : +886-2-2727-8899 Fax : +886-2-2656-2438	Asia Pacific BenQ Asia Pacific Corp. 12 Jihu Road, Neihu, Taipei 114, Taiwan Tel : +886-2-2727-8899 Fax : +886-2-2656-2438	China BenQ (IT) Co., Ltd. 181 Zhuyuan Road, Suzhou New District, Suzhou, China Tel : +86-512-6807-8800 Fax : +86-512-6809-7010	North America BenQ America Corp. 3200 Park Center Drive, Suite 150 Costa Mesa, CA 92626 U.S.A Tel : +1-714-559-4900 Fax : +1-714-557-0200	Europe BenQ Europe B.V. Meerenakkerweg 1-17, 5652 AR Eindhoven, The Netherlands Tel : +31(0) 88-888-9200 Fax : +31(0) 88-888-9299	Latin and Central America BenQ Latin America Corp. 8200 N.W. 33 Street, Suite 301 Miami, FL 33122 U.S.A. Tel : +1-305-421 1200 Fax : +1-305-421 1201
---	--	--	--	--	---

© 2022 BenQ Corp. Specification may vary by region, please visit your local stores for details. Actual product's features and specifications are subject to change without notice.
This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively
Doc: PDP_ST4302S/ST5502S/ST6502S/ST7502S/ST8602S_DS_EN_202203

All-in-One

Smart Signage with Ultra-Thin Bezels




BenQ Smart Signage Series



All-in-one smart signage with ultra-thin bezels

The ST02S upgrades enterprise, corporate and organisational conference capabilities while maintaining superb return on investment. Visuals are delivered in 4K ultra HD with vivid colours and sharp contrast on thin-bezel screens, putting an end to vague, blurry image quality that detracts from the impact and productivity of teleconferencing.

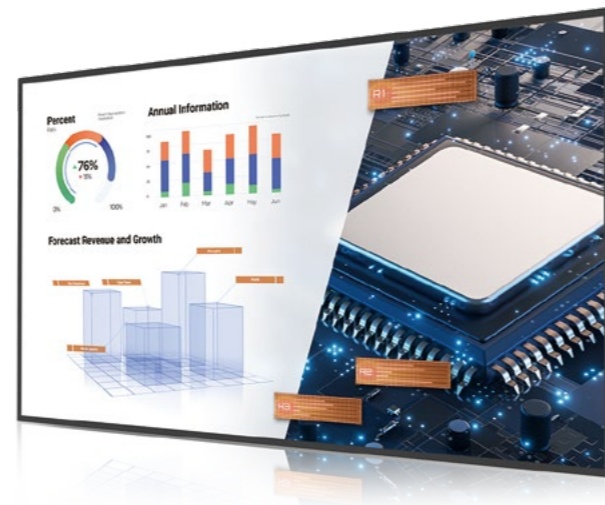

Made for Effective Meetings and Presentations



Successful Meetings with Optimal Clarity

4K ultra-high definition resolution (3840 x 2160) offers the most exquisite image detail for captivating meeting experiences.



True 4K UHD Detail

The ST02S is engineered to give users a more expansive canvas to showcase presentation, designs, ideas, and plans.

Easy-to-go Stand

Enables smart signage solutions with versatility on a whole new level. With removable wheels, the easy-to-go stands let you quickly move signage from one meeting room to another to maximise usability, reduce complexity, and save on unnecessary costs.



Work, Done More Effective



Hassle-free Video Conferencing

Start video meetings with a simple click on the ST02S. The OPS slot-in PC is fully compatible with top video conferencing solutions such as Zoom Rooms, Microsoft Teams, Google Meet, and Cisco Webex. TeamViewer Meeting is also pre-installed on all ST series displays.

Ready for “Bring Your Own Device” with InstaShare

Two-way mirroring and two-way touch control, plus up to 4 split screens supported - InstaShare has got you covered on your favorite personal devices, so go ahead and BYOD.



Built-In Android OS

Saves users the need for an external device as a source for an operating system, and means more gets done directly on the display for increased efficacy and user convenience.

Plug and Play

Lets you access and play multi-media files directly from a USB flash drive without requiring a PC connection or complicated setup.

Match your corporate image

The ST02S has a friendly interface, allowing you to switch and customise the default wallpaper to show your corporate image.



Management simplified

Free yourself from fuss. We've streamlined device and user management for you so you can focus on things that matter more.

Display Management System (DMS)

Centralised display management and the ability to keep display firmware and apps up to date via LAN or Internet.



Device Info and Management



Apps Management



OTA (Over-the-Air) Update



Dashboard

X-Sign CMS and Broadcasting Software

Edit, manage, and customise content in depth through the intuitive X-Sign Content Management Software (CMS), on-board the ST02S. Additionally, X-Sign Broadcast keeps teams in the know with a smart broadcasting system that offers instant delivery and easy management of push alerts, messages, and announcements.



Scheduled Broadcasting



Live Streaming



Group Message Broadcasting



YouTube Videos

Data and device protection




Protect your displays against malware while securing corporate data. BenQ offers data security and device protection through McAfee Mobile Security.

Specifications


Models	ST6502S	ST7502S	ST8602S
Panel			
Screen Size (inch)	65"	75"	86"
Backlight	Direct LED	Direct LED	Direct LED
Active Area (horizontal × vertical)(mm)	1428.6 × 803.5 mm	1649.7 × 927.9 mm	1894.0 × 1066.0 mm
Resolution (pixels)	3840 × 2160	3840 × 2160	3840 × 2160
Brightness (typical)	400 nits	400 nits	400 nits
Contrast Ratio (typical)	1200:1	1200:1	1200:1
Light Life (typical)	30,000hrs	30,000hrs	30,000hrs
Display Orientation	Landscape	Landscape	Landscape
Audio			
Internal Speaker (Amp)	10W × 2	10W × 2	10W × 2
Audio In/Out	PC Audio Input × 1 / Line Out × 1	PC Audio Input × 1 / Line Out × 1	PC Audio Input × 1 / Line Out × 1
Connectivity			
VGA In/Out	x1 / N/A	x1 / N/A	x1 / N/A
DVI In/Out	x1 / N/A	x1 / N/A	x1 / N/A
HDMI In/Out	x3 (2.0) / NA	x3 (2.0) / NA	x3 (2.0) / NA
USB port (Type A)	x2 (2.0)	x2 (2.0)	x2 (2.0)
RJ45 Port	x1	x1	x1
OPS-Slot	x1	x1	x1
Micro SD card	x1	x1	x1
Control			
RS232 In/Out	x1 / x1	x1 / x1	x1 / x1
IR In/Out	x1 / x1	x1 / x1	x1 / x1
Power			
AC/DC In	AC	AC	AC
Voltage	100 ~ 240Vac, 50Hz / 60Hz	100 ~ 240Vac, 50Hz / 60Hz	100 ~ 240Vac, 50Hz / 60Hz
Power Consumption (typical /standby)	132W / <0.5W	170W / <0.5W	310W / <0.5W
Mechanical			
Dimension (WxHxD) (mm)	1462.3 × 837.3 × 68.9	1683.5 × 961.7 × 82.9	1929.0 × 1100.0 × 79.4
Bezel Width (top/bottom/left/right) (mm)	14.9/14.9/14.9/14.9	14.9/14.9/14.9/14.9	15.5/15.5/15.5/15.5
Weight (w/o Packing/ w/ Packing) (kg)	29.0 / 37.4	36.0/46.1	50.0 / 64.3
Wall Mounting (VESA) (mm)	400 × 400 (4 holes); 4-M6 × 15L	600 × 400 (4 holes); 4-M8 × 15L	600 × 400 (4 holes); 4-M8 × 15L
Environment			
Operation Temperature	0°C ~ 40°C	0°C ~ 40°C	0°C ~ 40°C
Storage Temperature	-20°C ~ 60°C	-20°C ~ 60°C	-20°C ~ 60°C
Usage (Hour/Day)	18/7	18/7	18/7
OSD			
On-Screen Display Languages	EN/EF/GM/DT/PL/RS/CZ/DN/SW/IT/RM/FN/NG/GK/HG/SP/EP/TC/CN/AB/JP/TH/PS/VT/KR/TR/ID/HE (28 Langue)	EN/EF/GM/DT/PL/RS/CZ/DN/SW/IT/RM/FN/NG/GK/HG/SP/EP/TC/CN/AB/JP/TH/PS/VT/KR/TR/ID/HE (28 Langue)	EN/EF/GM/DT/PL/RS/CZ/DN/SW/IT/RM/FN/NG/GK/HG/SP/EP/TC/CN/AB/JP/TH/PS/VT/KR/TR/ID/HE (28 Langue)
Software			
Digital Broadcasting	X-Sign Broadcast	X-Sign Broadcast	X-Sign Broadcast
CMS	X-Sign 2.0	X-Sign 2.0	X-Sign 2.0
Device Management	DMS Cloud/Local	DMS Cloud/Local	DMS Cloud/Local
Video Conference	Teamviewer Meeting	Teamviewer Meeting	Teamviewer Meeting
Office Document Viewer	WPS	WPS	WPS
Browser	Firefox	Firefox	Firefox
Maintenance	Teamviewer QS	Teamviewer QS	Teamviewer QS
Accessories			
Remote Control	Yes	Yes	Yes
Power Cord (by region)	Yes	Yes	Yes
VGA/HDMI/DVI/DP/USB (touch) Cable	No / x1 / No / No / No	No / x1 / No / No / No	No / x1 / No / No / No
Quick Start Guide	Yes	Yes	Yes
User's Manual Electronic File	Yes	Yes	Yes

ST6502S

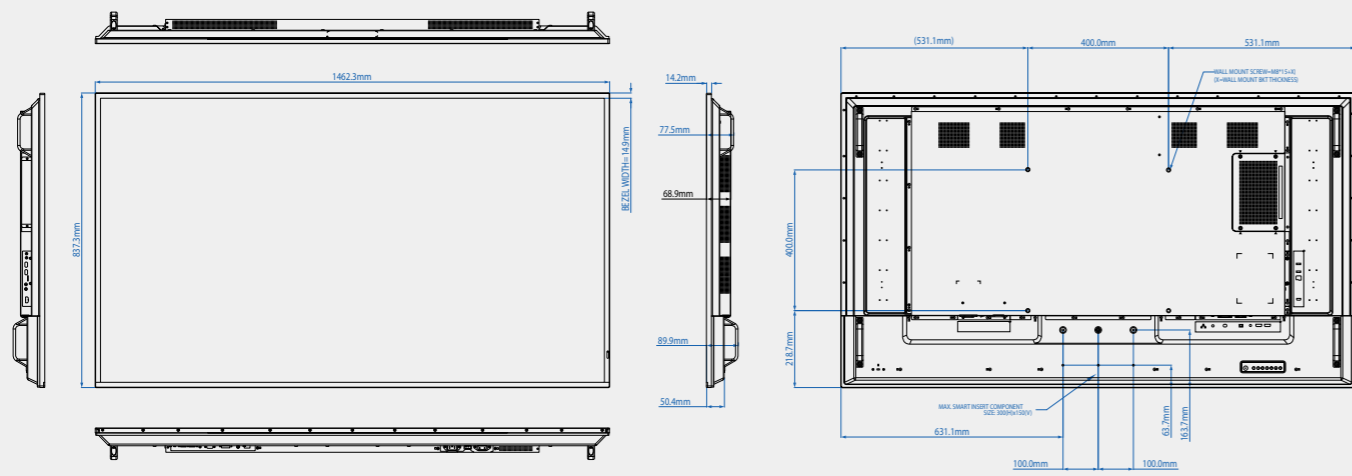


Dimensions

ST8602S

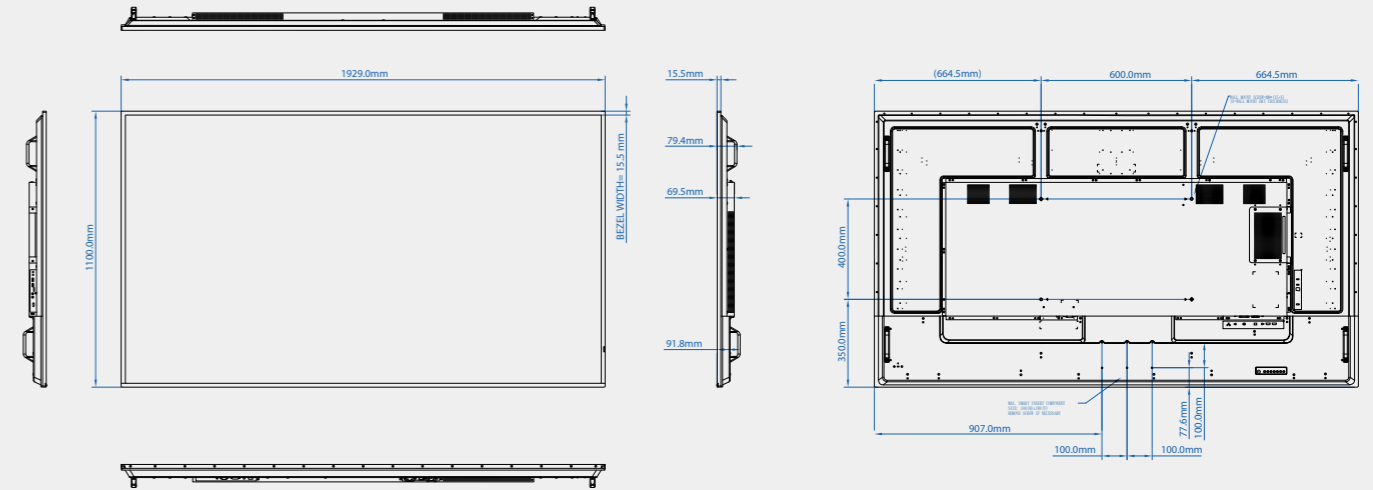


ST7502S

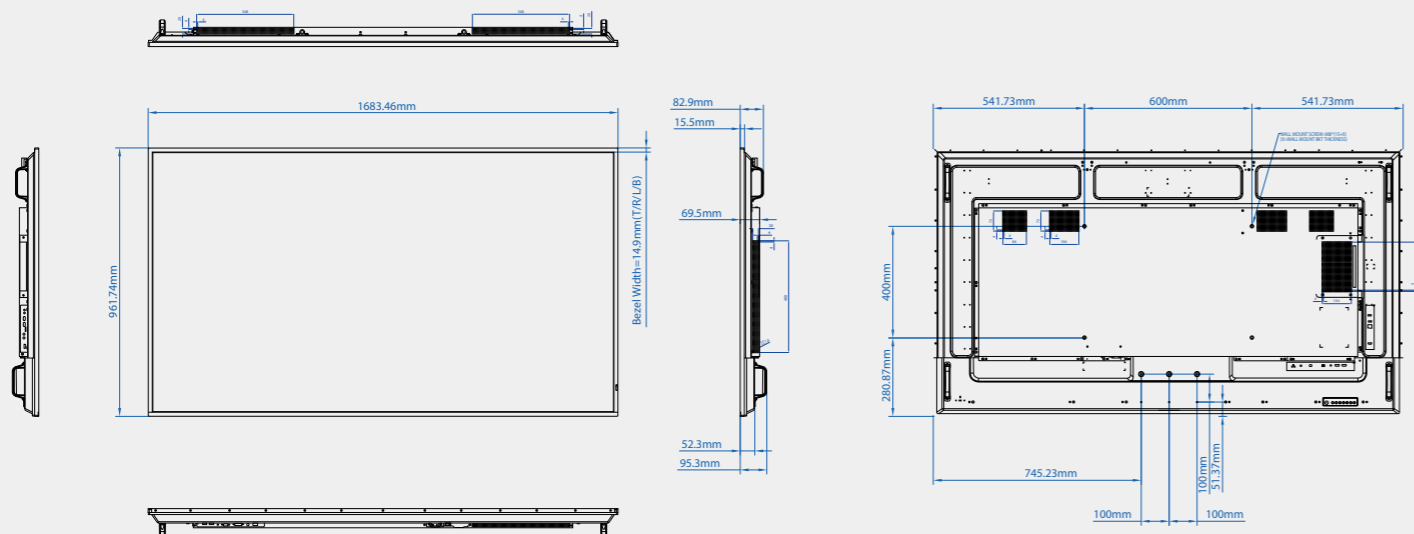


Input / Output Terminals

Bottom side

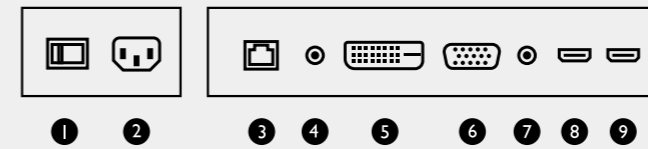

Left Side

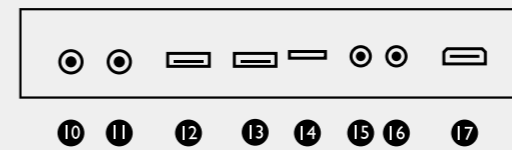

- 1 Power Switch
- 2 AC IN Port
- 3 RJ45
- 4 PC LINE IN
- 5 DVI (DVI-D) IN
- 6 VGA IN
- 7 AUDIO OUT
- 8 HDMI IN
- 9 HDMI2 IN
- 10 RS232 OUT
- 11 RS232 IN
- 12 USB2.0
- 13 USB2.0
- 14 MICRO SD
- 15 IR-OUT
- 16 IR-IN
- 17 HDMI3 IN