




Freestanding Dual Horizontal

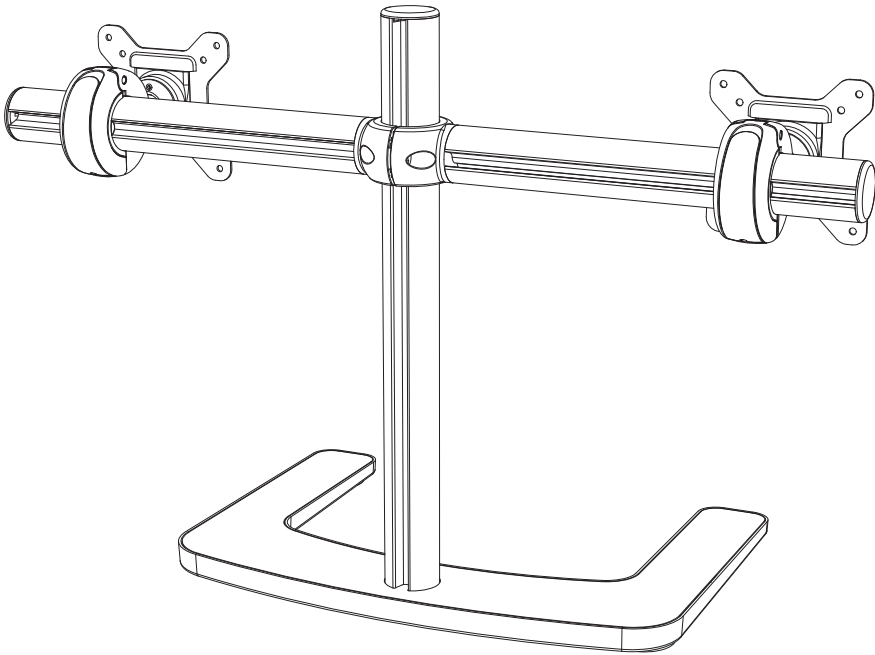


COMPONENT CHECKLIST



A  
Base  
(x1)



C  
Crossbar  
Arms  
(x1)



F  
3/5mm  
Allen Key  
(x1 each)




G  
M8x50mm  
Screw (x1)




H  
M6x25mm  
Cap Screw  
(x1)



B  
Upright  
Pole  
(x1)



D  
Quickshift  
Donut  
(x2)



E  
VESA  
Plate  
(x2)



I  
Mounting  
Screw  
M4x16mm  
(x8)



J  
Mounting  
Screw  
M4x12mm  
(x8)



K  
Mounting  
Screw  
M4x10mm  
(x8)



L  
(Optional)  
Security Screw  
(x2)



M  
Cable Ball  
(x6)



N  
Cable Clip  
(x4)



REQUIRED TOOLS

- Phillips Head Screwdriver

WEIGHT RANGE Per Monitor

| Flat Monitor            | Curved Monitor          |
|-------------------------|-------------------------|
| 0 - 12kg<br>0 - 26.5lbs | 0 - 12kg<br>0 - 26.5lbs |

IMPORTANT INFORMATION

- ! Please ensure this product is installed as per these installation instructions.
- ! Each Quickshift Donut supports a maximum weight of 12kg (26.5lbs).
- ! This product supports VESA mounting hole configurations: 75x75mm and 100x100mm.
- ! The manufacturer accepts no responsibility for incorrect installation.
- ! Curved monitors, deep devices (such as all-in-one PCs) and offset VESA locations exert additional leverage that can exceed the capacity of the mount even though the monitor weight may be within the stated range. Please contact Atdec if you would like further information.

1. Attach Upright Pole to Base

**1.1** Attach the Upright Pole to the Base as shown below. Ensure the Cable Slot faces towards the rear.

**OPTIONAL BOLT THROUGH & GROMMET MOUNT**  
Mount can also be bolted through work surface or grommet hole with the Atdec Grommet Clamp (AC-GC), sold separately.

2. Attach Crossbar and Donuts

**2.1** Attach Crossbar to pole.

**2.2** Slide donuts onto crossbar.


3. Attach the VESA Plate to your monitor (Repeat steps 3 to 6 for each monitor)

**3.1** Check VESA mounting compatibility


**3.2** Screw VESA Plate to back of monitor using provided screws.

## 4. Attach your Display to the Quickshift Donut


**4.1** Hook the top of the VESA plate onto the Quickshift Mount.

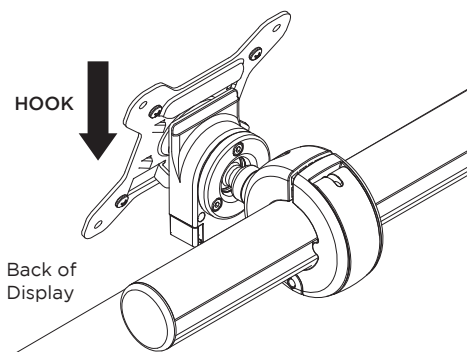

**4.2** Press and hold the two buttons on the Quickshift Mount. Gently push bottom of VESA Plate into Quickshift Mount. Release Buttons to lock in place.

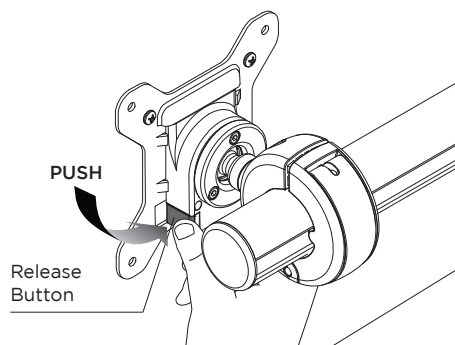


**4.3 (Optional)** Insert the Security Screw, and tighten using a Phillips-head Screwdriver.

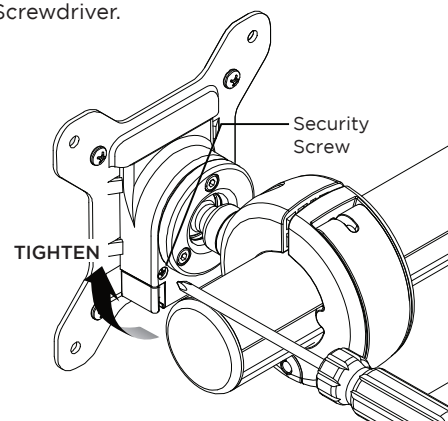


## 5. Adjust horizontal position of the monitor


**5.1** Open the lever to loosen the Quickshift Donut.

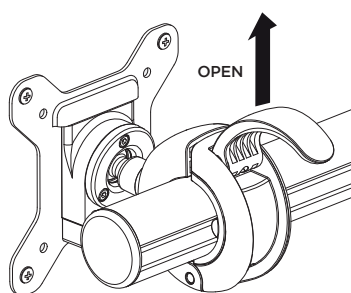


**5.2** Slide the Quickshift Donut to desired position.



**5.3** If necessary, adjust the tension between the Donut and the Pole using the 5mm Allen Key supplied.




**5.4** Close the lever to lock the Quickshift Donut in place.

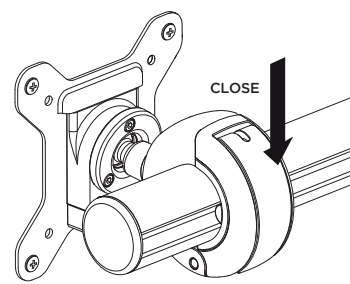

## 6. Adjust the ball joint tension

**6.1** If the monitors are not holding position or are stiff to move, adjust the tension plate by tightening or loosening the three screws.


**Note:** Support the monitor while making adjustments.

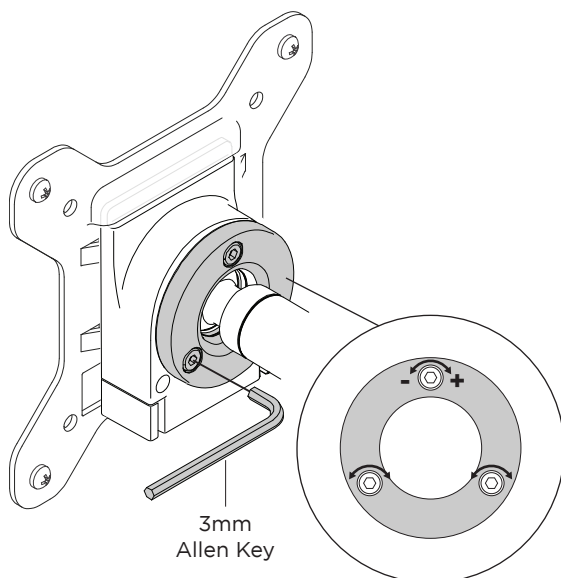

**Note:** Adjust 3 screws **evenly** in small increments







## 7. Cable Management

**7.1** Connect cables to your monitors. Then route them down to the table by inserting them into the cable slots in the Crossbar and Upright Pole. Use either the Cable Balls or Cable Clips to secure them in place as shown.

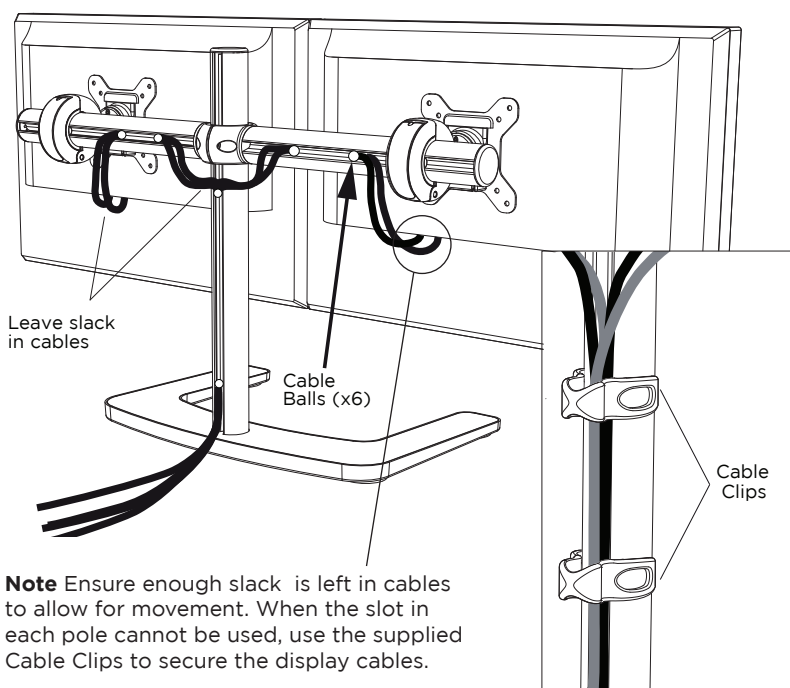

**Note** Ensure enough slack is left in cables to allow for movement. When the slot in each pole cannot be used, use the supplied Cable Clips to secure the display cables.

**OPTIONAL 8.** Switch to a single monitor mount
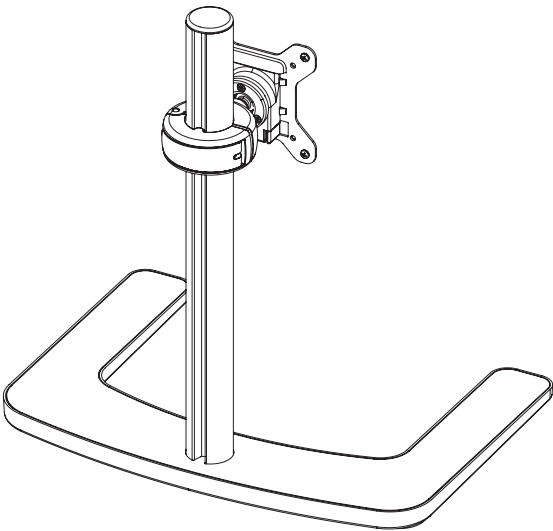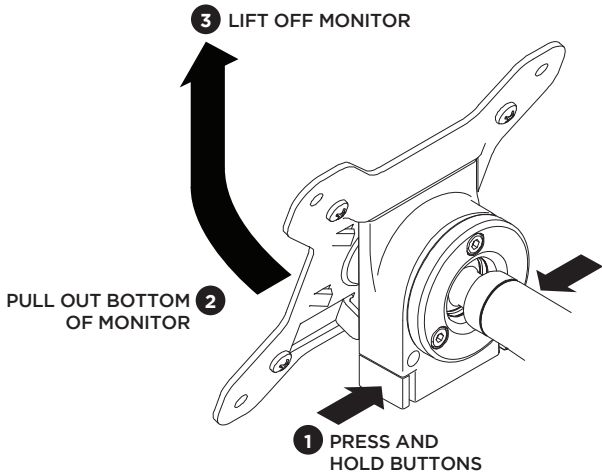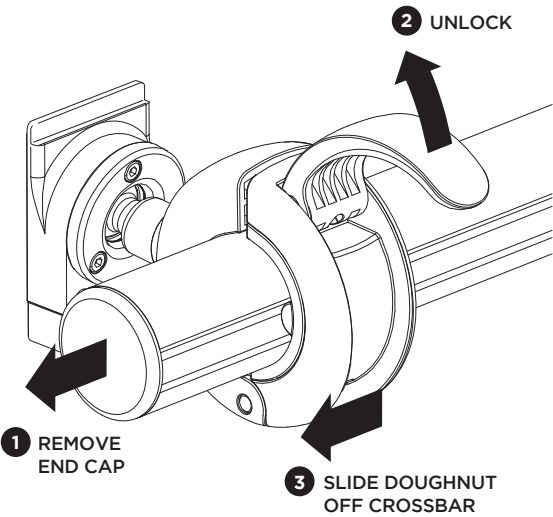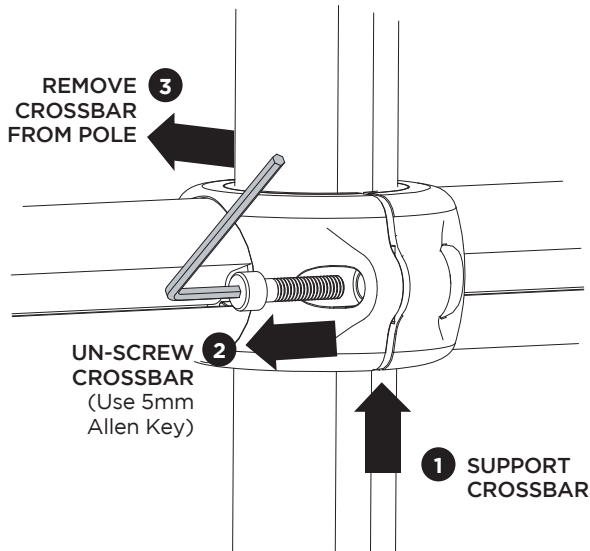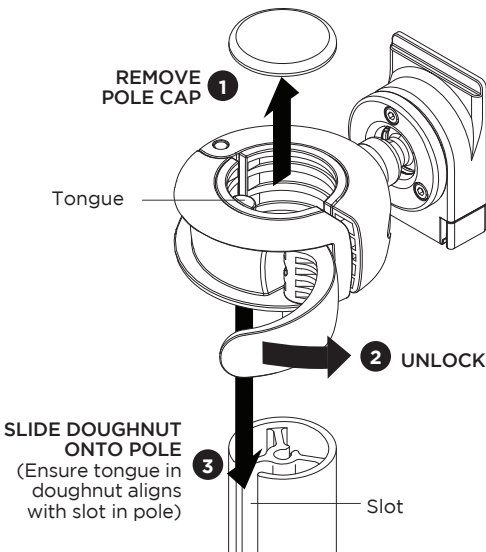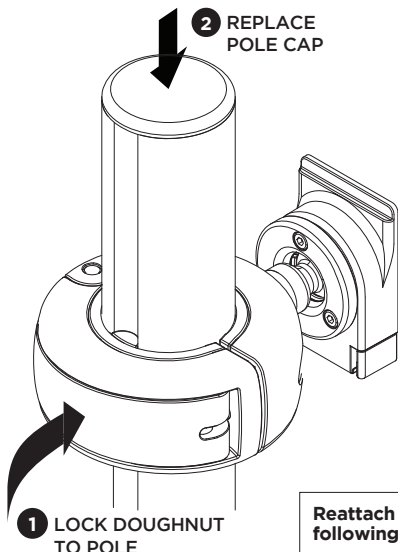
|   |  |
|---|--|
| <p><b>Preview</b></p>                      | <p><b>8.1 Remove monitors</b></p>    |
| <p><b>8.2 Slide off donut</b></p>         | <p><b>8.3 Remove crossbar from pole</b></p>   |
| <p><b>8.4 Slide Donut onto pole</b></p>  | <p><b>8.5 Lock Donut onto pole</b></p>  <div>Reattach monitor following steps 4.1 to 4.3</div> |