

GPU SuperServer SYS-120GQ-TNRT

1U Dual Processor (3rd Gen Intel® Xeon®) System with 4 PCIe GPUs



More details here

Key Applications

Scientific Virtualization, High Performance Computing, Rendering, AI/Deep Learning Training,


Key Features

- Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable Processors;
- Intel® C621A Chipset;
- 16 DIMM Slots; Up to 4TB DRAM; Up to 4TB Intel® Optane™ Persistent Memory (up to 6TB with DRAM) ; 3200/2933/2666 ECC DDR4 LRDIMM;RDIMM; Intel® Optane™ Persistent Memory 200 series;
- 6 PCIe Gen 4.0 x16 (4 FHFL & 2 LP);
- 2x 2.5" SATA Internal Fixed drive bays; 1 M.2 NVMe for boot drive only; 2x 2.5" NVMe Hot-swap drive bays;
- 9 counter rotating fans w/ Optimal Fan Speed Control;
- 2x 2000W redundant Titanium level power supplies;




Form Factor	1U Rackmount Enclosure: 437 x 43 x 894mm (17.2" x 1.7" x 35.2") Package: 609.6 x 203.2 x 1168.4mm (24" x 8" x 46")
Processor	Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors Up to 40C/80T; Up to 60MB Cache per CPU Supports up to 235W TDP CPUs (Air Cooled)
GPU	Supported GPU: NVIDIA A100,A40,A30,A16,RTX-A6000,RTX-A5000 CPU-GPU Interconnect: PCIe 4.0 x16 CPU-to-GPU Interconnect GPU-GPU Interconnect: PCIe
System Memory	Memory Capacity: 16 DIMM slots Up to 4TB: 16x 256 GB DRAM and 8x 512 GB PMem Memory Type: 3200/2933/2666MHz ECC DDR4 RDIMM/LRDIMM Intel® Optane™ persistent memory 200 series
Drive Bays	4x 2.5" hot-swap NVMe/SATA/SAS drive bays (2x 2.5" NVMe dedicated) 1 M.2 NVMe OR 1 M.2 SATA3
Expansion Slots	4 PCIe 4.0 x16 FHFL slot(s) 2 PCIe 4.0 x16 LP slot(s)
On-Board Devices	SATA: SATA3 (6Gbps); RAID 0/1/5/10 support Chipset: Intel® C621A Network Connectivity: 2x 10GbE BaseT port(s) IPMI: Support for Intelligent Platform Management Interface v.2.0 IPMI 2.0 with virtual media over LAN and KVM-over-LAN support
Input / Output	Video: 1 VGA port(s)

(Front View – System)

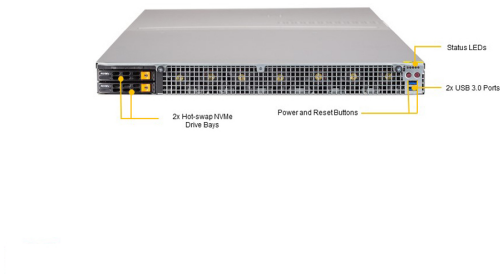

(Rear View – System)

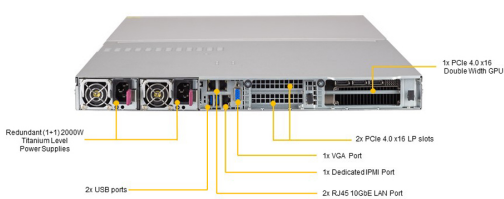

System Cooling	9 heavy duty fan(s)
Power Supply	2000W Redundant Titanium Level power supplies
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	Redfish API; Supermicro Server Manager (SSM); Supermicro Power Manager (SPM); Supermicro Update Manager (SUM); SuperDoctor® 5; Super Diagnostics Offline ; KVM with dedicated LAN ; IPMI 2.0
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory 7 +1 Phase-switching voltage regulator FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Height: 1.7" (43 mm) Width: 17.2" (437 mm) Depth: 35.2" (894 mm) Gross Weight: 58 lbs (26.31 kg) Net Weight: 45 lbs (20.4 kg) Packaging: 8" (H) x 24" (W) x 46" (D) Available Color: Black Front & Silver Body
Operating Environment	Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	Super X12DGQ-R
Chassis	CSE-118GQE2TS-R2K05P