

VB342 TV Mount Design



Alf Cheng | 2018/05/11 | AVer Information Inc. | www.aver.com


VB342 TV Mount Components

Item	Name	Figure	Amount	Note
1	Fixture		2	SPCC Paint t=3.0mm
2	Metal washer		2	SPCC Paint t=3.0mm
3	U8D0_Silicone washer		2	203AOAAAAAN7
4	Screw		2	100AAAAAAAMF (For VB342)

Install VB342 TV Mount




1.

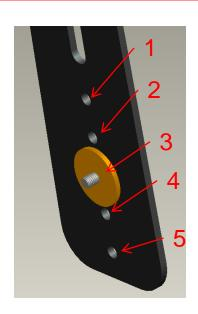

Fix the screw with silicone washer in suitable holes(1~5).

2.

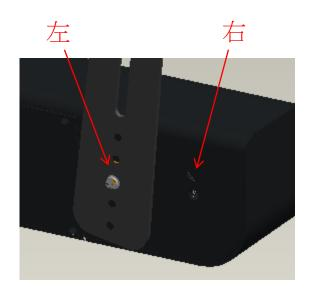


Secure the fixture which has completed step 1 on the left side fix hole or right side fix hole. Don't screw tight.






3. Place metal washer on the fix hole of TV.

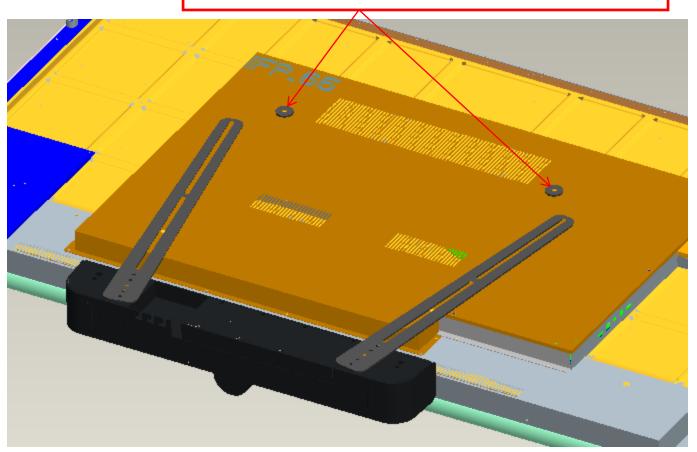






4. Place mount rack of TV on it.

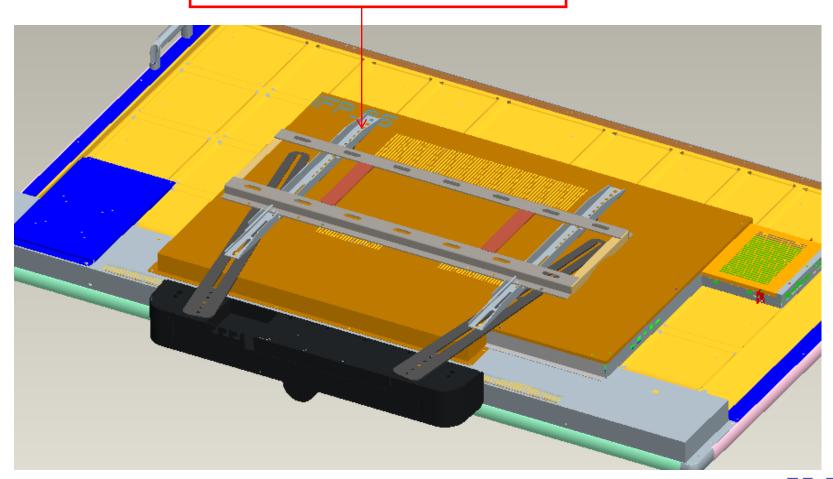






5. Screw the TV rack mount as figure show but don't screw tight.

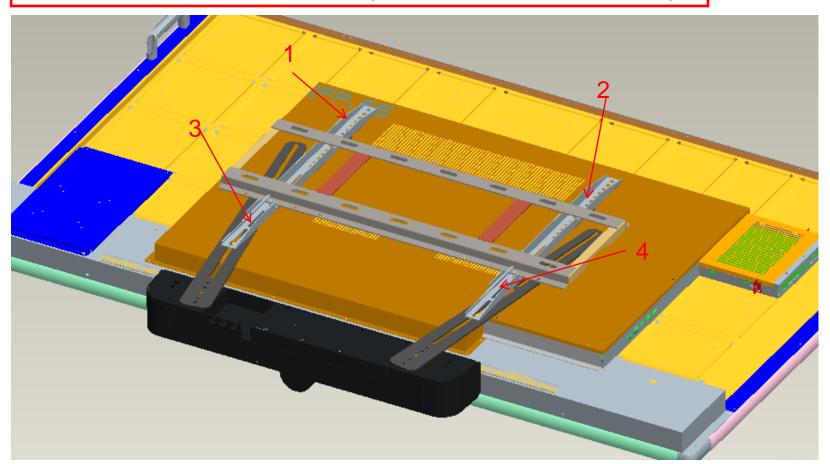





6. Move the VB342 to proper position and screw tight 1~6 screws by order as figure shown.

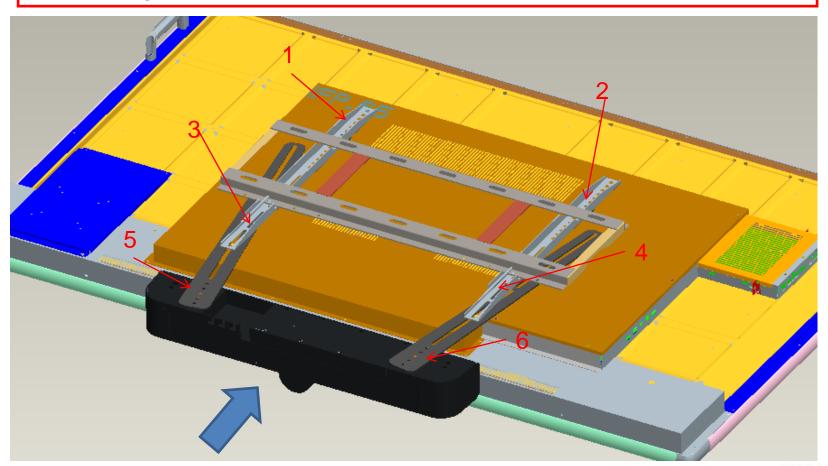




VB342 TV Mount Dimension Analysis




560-440									
		А	В	С	D	備註			
1	CHIMEI 42	400	200	173.7	370				
2	Pansonic 50	400	200	321.2	227.3				
3	Pansonic 55	400	200	298.3	327				
4	IFP 65	500	400	462.6	173.8				
5	IFP 75	600	400	363.2	418.9				
6	IFP 86	700	400	453.7	494				

VB342 TV Mount Fixture Size

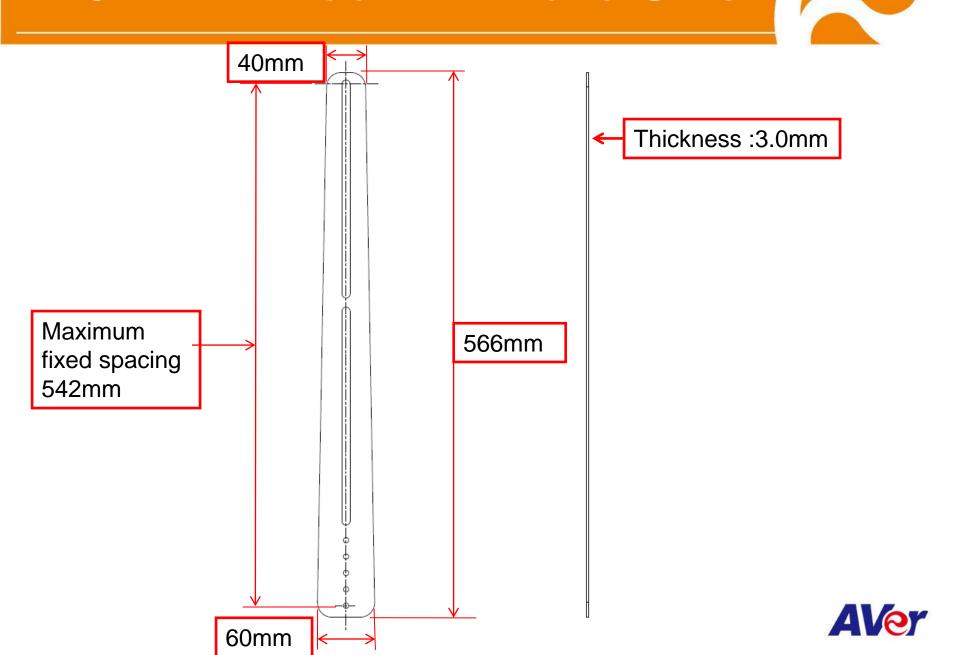


VB342 TV Mount Schematic



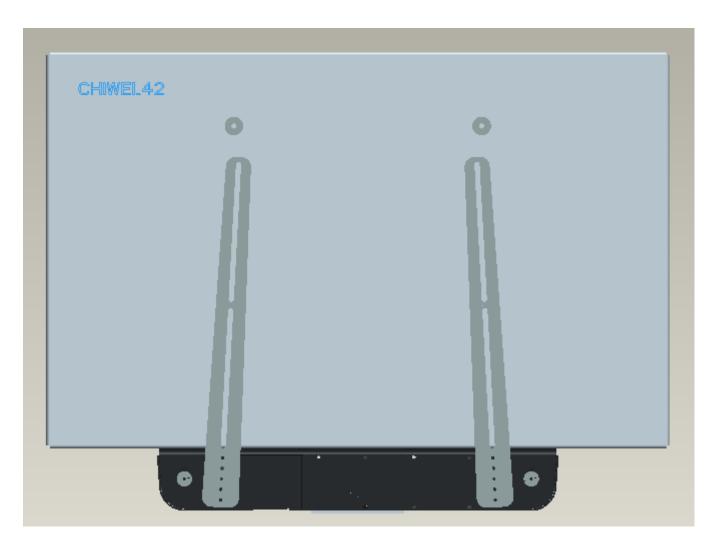




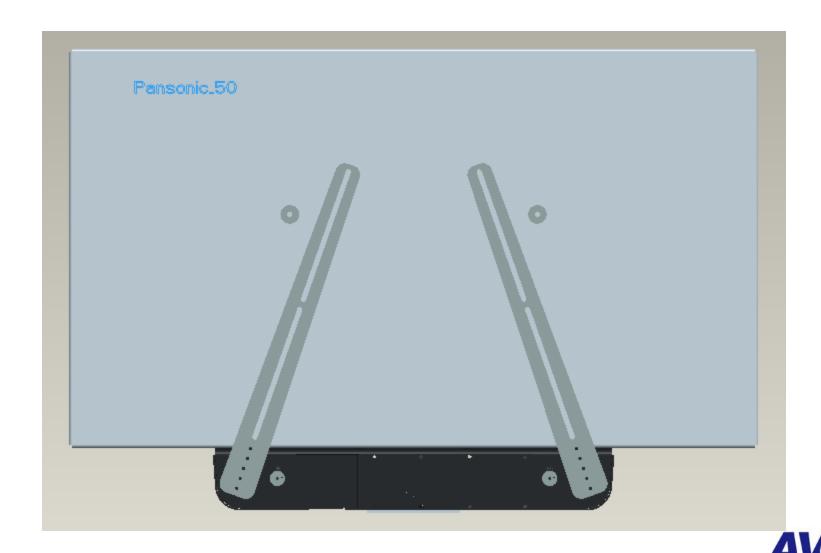






IFP_65"

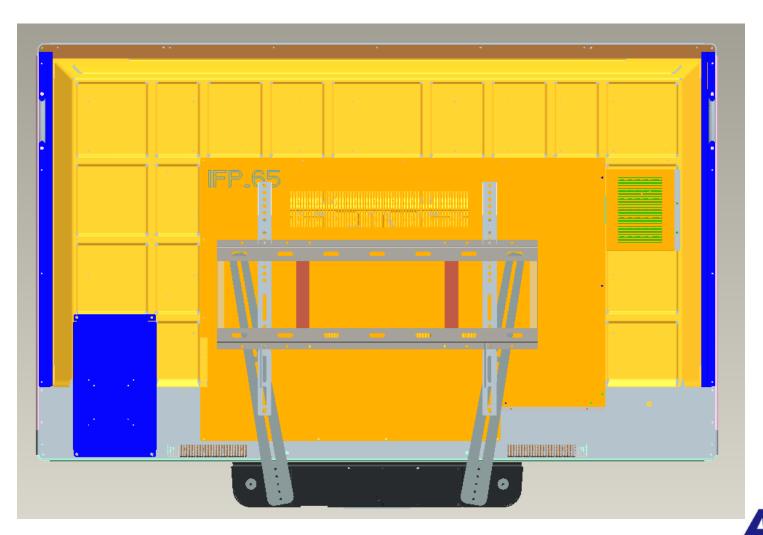


IFP_75"

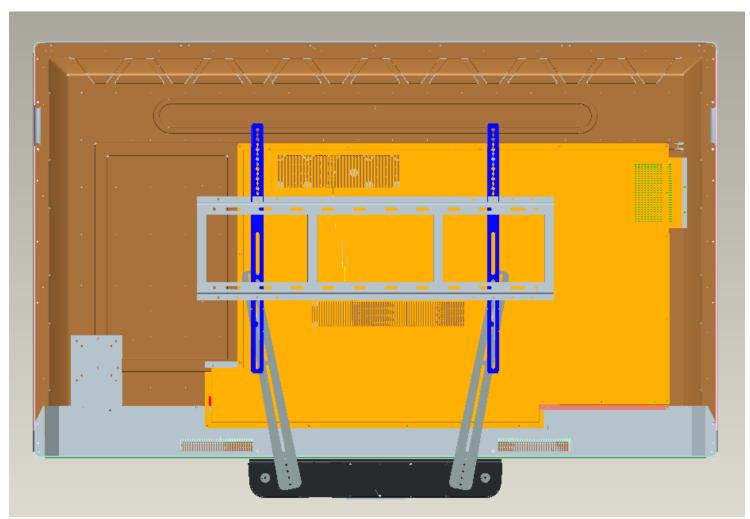



IFP_86"

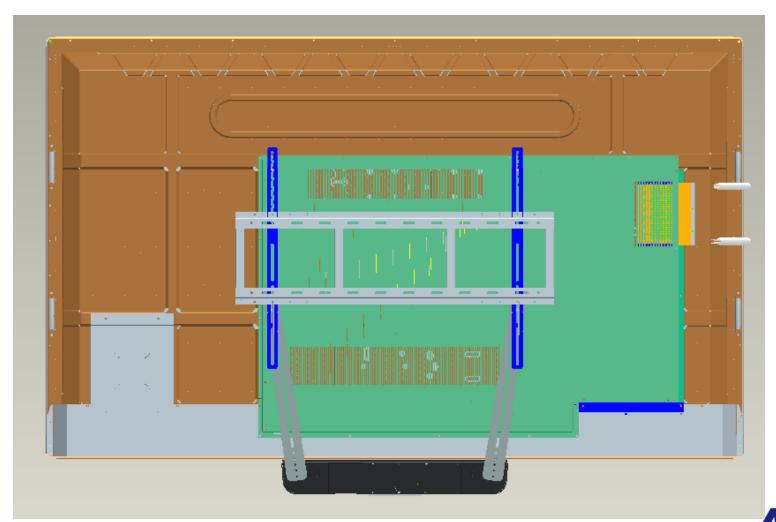

END

